
LEXIS R-200
STEP LIGHT


divinity lights














LEXIS R-200

Lexis R-200 Step light has :

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- Extremely sustainable and requires little maintenance
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- Wall Light with integrated LED for orientation of pavements, stairs or terraces
- Excellent downward illumination with minimal power consumption
- Sleek & sophisticated round shape surface mounted LED light designed to elevate your outdoor lighting experience

divinity lights

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

70 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens With Tempered Glass

L70 @50,000h


Aluminium Die-Cast


Types

Wall Surface

Single Line Diagram


LEXIS- R/200

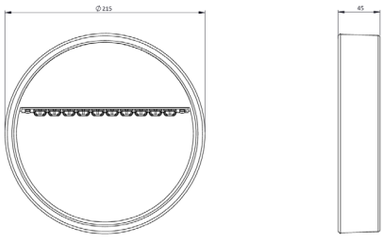



CRI ≥ 80

LEXIS R-200



LEXIS- R/200

System Power	Dimensions
12W	Dia- 200mm, H- 35mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>80

Beam Angle

Forward-Throw Distribution

Control

Non Dimmable

Dali Dimmable

Mounting Type

Wall Surface

Material Colour

RAL as per request