


MAVERICK
ANTIGLARE STRIP

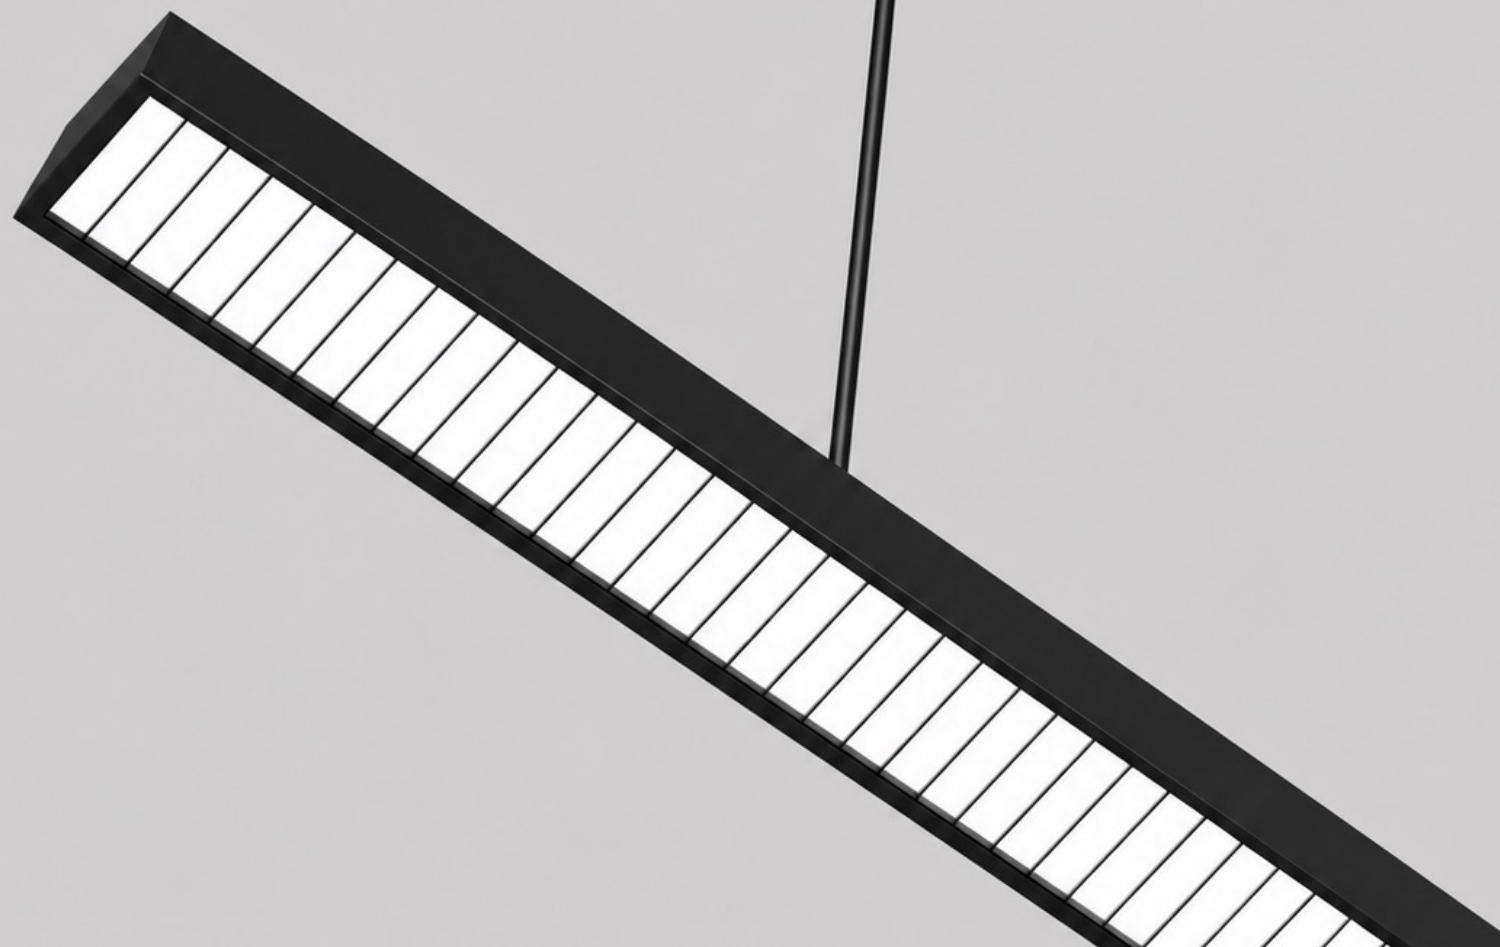

divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Diffuser with Antiglare strip

L70 @50,000h

Aluminium




Types

Pendant/ Surface Mounted

Single Line Diagram

Pendant/ Surface Mounted

Profile Code

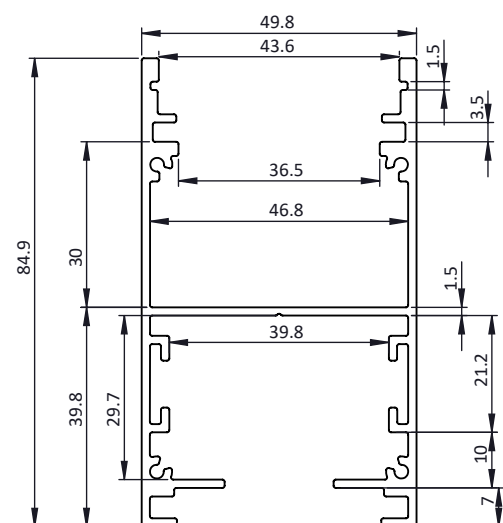


MAVERICK ANTIGLARE STRIP

Maverick antiglare strip linear fixture has:

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- A new concept on Louver Technology with high glare control
- Uniform illumination
- Visual comfort with panache
- Available in Matte Black
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

MAVERICK ANTIGLARE STRIP



MAVERICK ANTIGLARE STRIP (DIRECT)

System Power	Dimensions
14W	L = 600mm W = 49.8mm H = 84.9mm
28W	L = 1200mm W = 49.8mm H = 84.9mm
56W	L = 2400mm W = 49.8mm H = 84.9mm

MAVERICK ANTIGLARE STRIP (DIRECT-INDIRECT)

System Power	Dimensions
25W	L = 600mm W = 49.8mm H = 84.9mm
40W	L = 1200mm W = 49.8mm H = 84.9mm
70W	L = 2400mm W = 49.8mm H = 84.9mm

Order Options

Distribution

Direct
Indirect

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

120°

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Pendent
Surface

Material Color

RAL As Per Request

Antiglare Frame

Matt Black Antiglare