

MAYES D (DIRECT- INDIRECT)

Direct -Indirect | Task Lights



MAYES F (DIRECT- INDIRECT) Luminaire housing of aluminum with premium powder coating finish.


Powered by high-quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long-term reliability. Optics of LPG (Light Guide Plate) uniform light distribution.

With a size of 1342mm Arm Length, 310mm width and 1950mm height, this fixture is crafted for direct + indirect light distribution making it ideal for professional applications. Numerous combination of lamp Head design for vriety of desks.

Customisations in RAL finish, Wattages available as per request to enhance installation and functionality.

Single Line Diagram

Surface Mounted

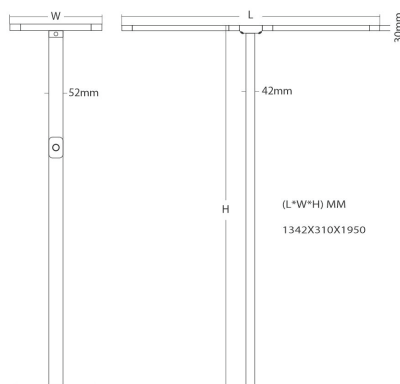

MAYES F (DIRECT- INDIRECT)



Quick Info

Mounting Type

Surface

Material Colour

Powder Coated (Grey)

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

110°

Optics

Lens

Reflector

Efficacy

3000-

4000-

5700-

Tunable White 2700K-6500K-

Electrical

Wattage - 160W

Input Voltage- 220-240 VAC

Light Distribution

Direct- Indirect

Up-50%/ Down- 50%

Up-30%/ Down- 70%

Up-70%/ Down- 30%

Up-20%/ Down- 80%

Up-80%/ Down- 100%

Physical

Arm Length- 1342mm

Width- 310mm

Height- 1950mm