

**MAYES D
TASK LIGHT**

divinity lights





Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

Non-Dimmable

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

LGP (Light Guide Plate)


L70 @50,000h

Aluminium Die-cast

Types

Surface

Single Line Diagram

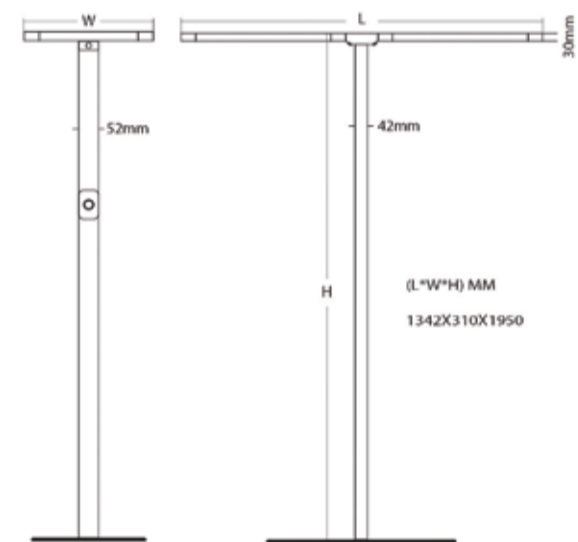

MAYES D

Mayes D fixture has :


- Free standing double arm Task light luminaire
- Luminaire housing of aluminium
- Premium powder coated finish
- High efficiency LGP (Light Guide Plate) optics
- SMD (Surface Mount Device) technology
- LED with high colour rendering
- Interpretation of the real environment light and colours
- Minimalistic design
- Numerous combinations of lamp head designs for a variety of desks

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

MAYES D



MAYES D (DIRECT)

System Power	Dimension
80W	Arm L= 1342mm W= 310mm H= 1950mm

MAYES D (DIRECT-INDIRECT)

System Power	Dimension
160W	Arm L= 1342mm W= 310mm H= 1950mm

Order Options

CCT (Colour Temperature)

2700K available in 10,15, & 22 watts

3000K

4000K

6000K

CRI

>90

Beam Angle

110°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



VOLTAGE

24V DC

Mounting

Floor Surface