

MIDI CATENARY LIGHTS

Direct | Catenary




MIDI CATENARY LIGHT luminaire features a compact, modern design crafted from durable aluminium die-cast housing with a high-quality powder-coated finish.

Powered by high-performance LEDs with a binning tolerance of ≤ 3 SDCM, this fixture ensures reliable and efficient illumination for outdoor environments. Designed for catenary suspension, it eliminates the need for poles, making it ideal for area and street lighting in plazas, walkways, and open public spaces. With an IP66-rated construction, it offers excellent protection against dust and moisture. Available in mono-colour, RGB, RGBW and mono with a decorative polycarbonate shade, it brings both functionality and character to any installation. The fixture supports various beam angles (20°/ 45°) and comes equipped with hanging accessories for sturdy mounting. With a diameter of 290mm and a with snoot height of 500mm, customisations in finish and wattage are available upon request for enhanced integration.

Single Line Diagram

Catenary Mounted

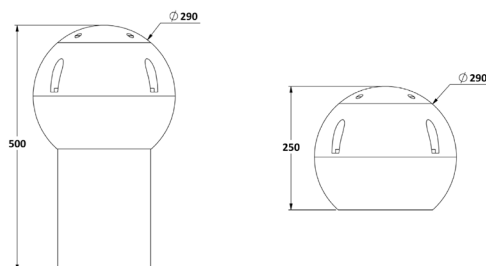

MIDI CATENARY LIGHTS



Quick Info

Mounting Type

Catenary

Material Colour

Customize RAL available

Protection mode

IP66

Driver Details

Non-Dimmable/ Dali-Dimmable/ DMX Controller

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K/ 3000K/ 4000K/ RGB/ RGBW

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

20°/ 45°

Optics

Lens

Efficacy

80lm/W

Electrical

Wattage - 100W

Input Voltage- 220-240V AC

Physical Dimensions

Dia- 290mm

With Snoot Height- 500mm

Without Snoot Height- 250mm