


MIDI
CATENARY LIGHT

divinity lights



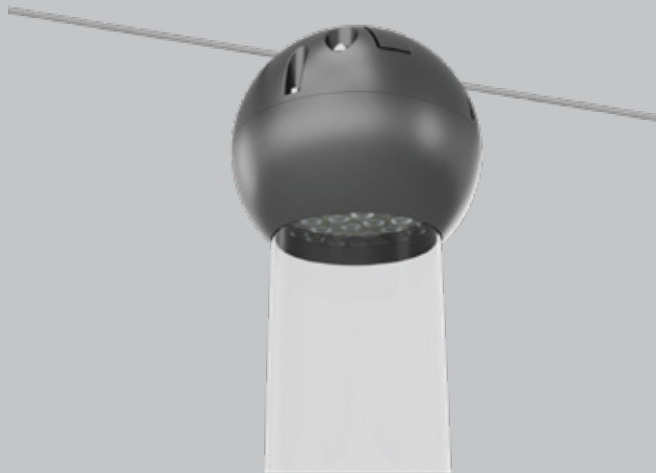

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K, RGB, RGBW

Non-Dimmable/ Dali-Dimmable

DMX Controller

SDCM<3

Lens



L70 @50,000h

Aluminium Die-Cast

Type

Catenary


Single Line Diagram

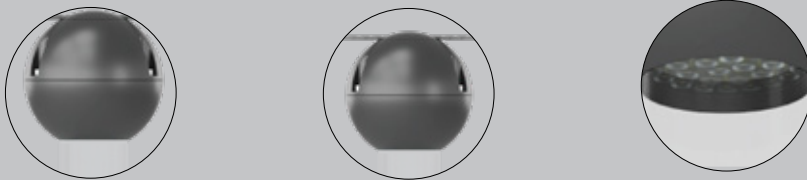

MIDI CATENARY LIGHT

Midi Catenary fixture has :

- Luminaire housing of Die-Cast Aluminium
- Catenary Mounted
- Fixture is available in three different colour options
 - a) Monocolour
 - b) RGB
 - c) Monocolour with decorative colourful polycarbonate shade
- Multiple options of antiglare and decorative
- Zero multiple shadows
- Various beam angle range from 20°, 45° LED with effective colour rendering
- Interpretation of the real environment light
- Finned heat sinks to dissipate heat and increase performancer



CRI ≥ 80

MIDI CATENARY LIGHT



System Power	Dimensions
100W	Dia=290mm, Without Snoot H=250mm, With Snoot H=500mm

Order Options

CCT (Color Temperature)

2700K

3000

4000K

RGB

RGBW

CRI

>80

Beam Angle

20°

45°

Control

Non-Dimmable

Dali- Dimmable

DMX Controller



Mounting Type

Catenary

Material Color

RAL code as per request