

MINMID
CATENARY LIGHT

divinity lights






Quick Info

CRI ≥ 80
 2700K, 3000K, 4000K, RGB, RGBW
 Non-Dimmable/ Dali-Dimmable
 DMX Controller
 SDCM<3
 Lens
 L70 @50,000h
 Aluminium Die-Cast

Type

Catenary


Single Line Diagram

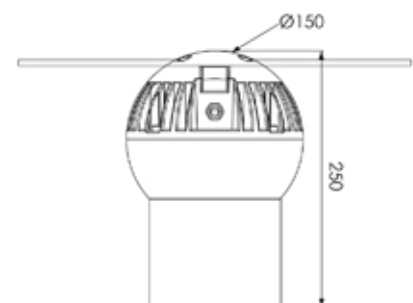

MINMID CATENARY LIGHT

Minmid Catenary Light has :

- Luminaire housing of Die-Cast Aluminium
- Catenary Mounted
- Fixture is available in three different colour options
 - a) Monocolour
 - b) RGB
 - c) Monocolour with decorative colourful polycarbonate shade
- Multiple options of antiglare and decorative
- Zero multiple shadows
- Various beam angle range from 15°, 24°, 45°
- LED with effective colour rendering
- Interpretation of the real environment light
- Finned heat sinks to dissipate heat and increase performance



CRI ≥ 80

MINMID CATENARY LIGHT



System Power	Dimensions
40W	Dia=150mm, With Snoot H=250mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

RGB

RGBW

CRI

>80

Beam Angle

15°

24°

45°

Control

Non-Dimmable

Dali- Dimmable

DMX Controller



Mounting Type

Catenary

Material Color

RAL code as per request

ACCESSORIES

