



Quick Info

CRI ≥ 80 /90

2700K, 3000K, 4000K

Up to 85 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens


L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

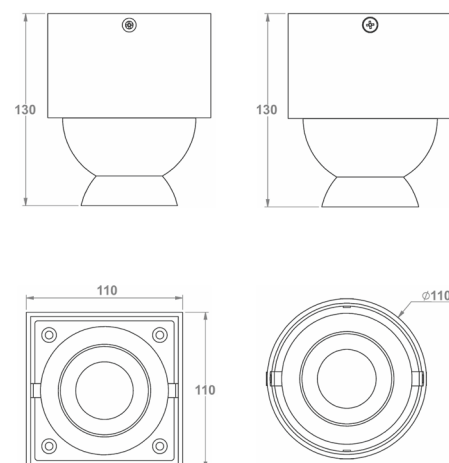


MINI CEILING LIGHT

The Z Ball mini ceiling light :

- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & moisture
- The built quality ensures long and maintenance free service life
- Elegant range can be used in high end outdoor applications
- Powerful and precise optics
- Energy-efficient LED with high colour rendering
- Available in narrow and wide beam angles

Light Distribution



CRI ≥ 80/90

MINI CEILING LIGHT



Product Order Code	System Power	Dimensions
1512	10W	Dia=110mm, H=130mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>80
>90

Beam Angle

Narrow
Medium
Wide

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Surface

Material Colour

Black ●
Grey ●