




Quick Info

CRI ≥ 80 /90
 2700K, 3000K, 4000K
 Up to 85 lm/W
 Non-Dimmable/ Dali-Dimmable
 SDCM<3
 Lens
 L70 @50,000h
 Aluminium Die-Cast

Types

Wall Mounted

Single Line Diagram

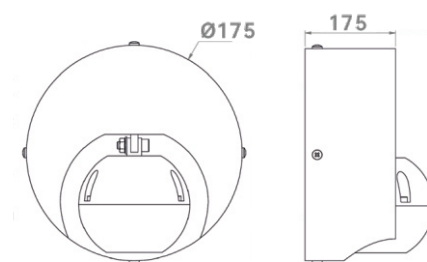


MINI WALL LIGHT

The Z Ball mini wall light :

- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & Moisture
- The built quality ensures long and maintenance free service life
- Elegant range can be used in high end outdoor applications
- Multiple beam angles and anti-glare accessories available
- Energy-efficient LED with high colour rendering
- Elegant range can be used in high end outdoor applications

Light Distribution



CRI ≥ 80/90

MINI WALL LIGHT



Product Order Code	System Power	Dimensions
1511	10W	Dia=175mm, H=175mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>80
>90

Beam Angle

Narrow
Medium
Wide

Control

Non-Dimmable



Dali-Dimmable



Mounting Type

Wall Mounted

Material Colour

Black



Grey

