

**ONYX T145 DUO
DIFFUSER**



Quick Info

CRI ≥90
 3000K/ 4000K/ 5700K
 ON-OFF/ON-OFF (FLICKER FREE)
 DALI-2 DT6 / DALI-2 DT8/ DALI+
 SDCM<3
 L70 @50,000h
 Lens + Micro Prismatic Diffuser
 Aluminium



Types

Recessed with Frame in GYPSUM Ceiling
 Recessed in T-Bar Techzone Ceiling

Single Line Diagram

Recessed Mounted

Profile Code
 SY-117

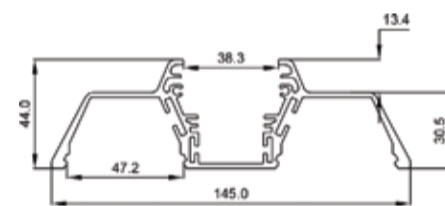


ONYX T145 DUO DIFFUSER

This light features has:

- Luminaire housing of extruded aluminium
- Surface powder coated
- Snap-fit system and no visible screw
- Bottom opening for easy maintenance
- LED PCB mounted on insert design with heat sink
- M6 bolt for M6 fastener
- Lens + Prismatic double diffuser
- Energy-efficient LED with color rendering
- Glare control with Uniform illumination

Light Distribution

Direct



CRI ≥ 90



TUNABLE WHITE

ONYX T145 DUO DIFFUSER



ONYX T145 DUO DIFFUSER (DIRECT)

System Power	Dimension
30W	W = 145mm, H = 44mm
45W	W = 145mm, H = 44mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

120°

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Recessed

Material Color

RAL As Per Request