

ORB WALL LIGHTS

Direct | Surface



ORB WALL LIGHT luminaire features a sleek, modern design crafted from aluminium die-cast housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 80$, this fixture ensures excellent color rendering and long-lasting performance. It maintains at least 70% of its luminous flux after 50,000 operating hours, guaranteeing durability and reliability over time. The high-efficiency **Lens** delivers a soft, uniform 360° beam ideal for outdoor wall-mounted applications, providing cozy, glare-free downward illumination. With IP65-rated waterproof construction and availability in both round and square shapes, ORB WALL LIGHT is perfect for entrances, terraces, and architectural facades.

With a standard size of 210mm Dia, and 100mm height, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

Single Line Diagram

Surface Mounted

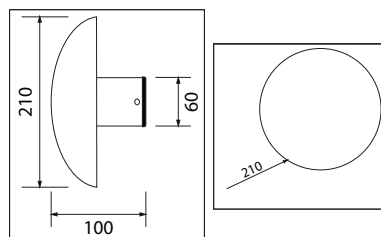

ORB WALL LIGHTS



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP65

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K/ 3000K/ 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

360°

Optics

Lens

Efficacy

80lm/W

Electrical

Wattage - 10W/m

Input Voltage- 220-240V AC

Physical Dimensions

Dia- 210mm

Height- 100mm