


ORBIT DOWNLIGHT

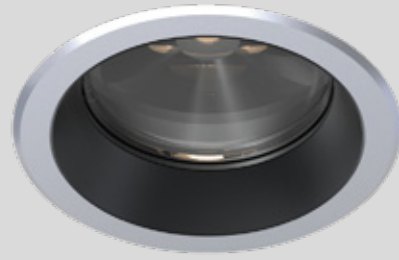

Quick Info


CRI ≥ 90
3000K/ 4000K/ 5700K
ON-OFF/ON-OFF (FLICKER FREE)
DALI-2 DT6, DALI-2 DT8, DALI+
SDCM<3
Lens
L70 @50,000h

Types


Recessed

Single Line Diagram


ORBIT 40

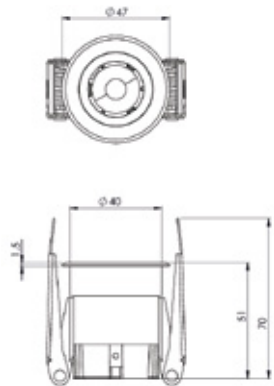

ORBIT 52

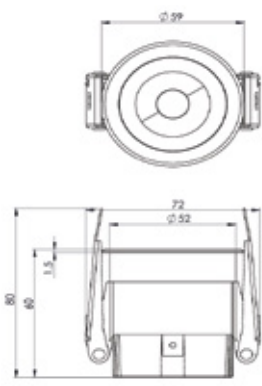

ORBIT 68

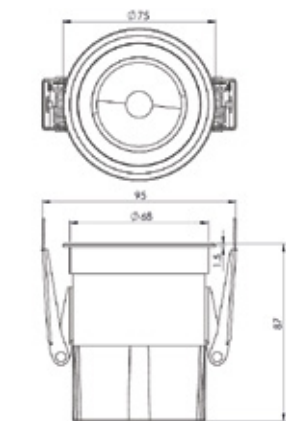

Light Distribution



CRI ≥ 90



TUNABLE
WHITE

307



ORBIT DOWNLIGHT

Orbit Downlight features has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology
- Available in Fixed version
- LED with effective colour rendering
- Provides comfortable illumination with reduced eye strain, ideal for premium interiors.
- Delivers focused and controlled light distribution for accent
- Ensures excellent lumen output with low energy consumption.

ORBIT DOWNLIGHT



ORBIT 40

System Power	Dimension	Beam Angle
5W	Outer Dia- 47mm, Cut-out Dia- 40mm, Height- 51mm	15°, 24°, 35°, 60°

ORBIT 52

System Power	Dimension	Beam Angle
10W	Outer Dia- 59mm, Cutout Dia- 52mm, Height- 60mm	8°,10°,15°, 26°, 36°, 60°

ORBIT 68

System Power	Dimension	Beam Angle
15W	Outer Dia- 75mm, Cutout Dia- 68mm, Height- 87mm	10°,15°, 26°, 36°, 60°

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

15°

26°

36°

60°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Reflector Colour

Black

White

Gold

Rose Gold

Material Colour

RAL As Per Request