


P1 WALL GRAZER

divinity lights

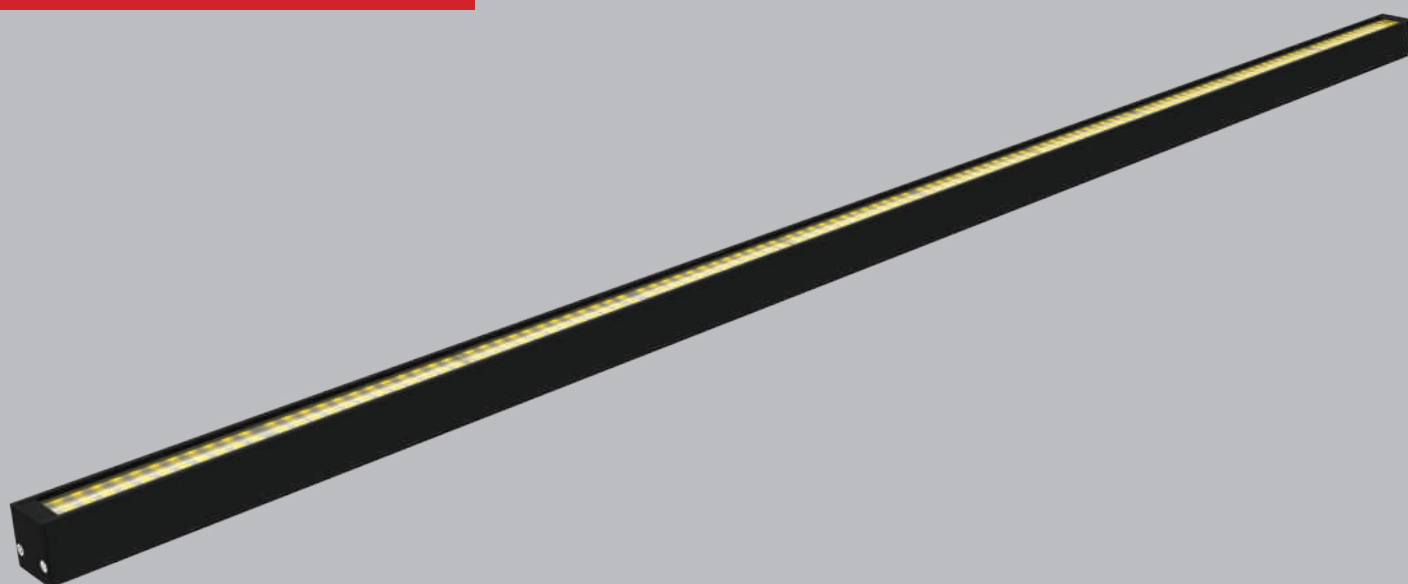

Quick Info

CRI ≥ 80/90/95

3000K/ 4000K/ 5700K/ 6500K

Tunable White 2700K-6500K

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

Lens




L70 @50,000h

Aluminium

Types

Surface

Single Line Diagram

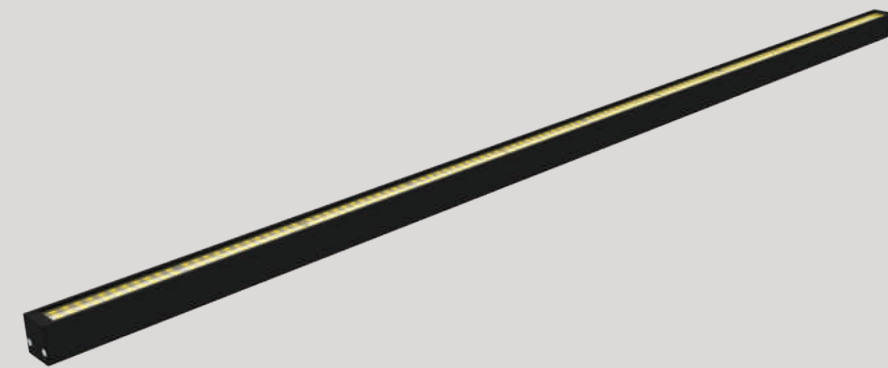

P1 WALL GRAZER

P1 Wall Grazer has :


- Luminaire housing made of extruded aluminium
- Grazes walls
- Accentuates surface textures better
- Reduces hotspots and dead zones
- Custom engineered
- Precision optics provide a narrow 10° beam
- Accommodates a wide range of wall heights
- Perfect longitudinal glare reduction
- Uniform illumination
- Energy efficient LED with effective colour rendering

Colours



Light Distribution

Direct



CRI ≥ 80/90/95



TUNABLE
WHITE

P1 WALL GRAZER



P1 WALL GRAZER

Product Order Code	System Power	Dimension
8001-1	10W/m	L=300mm, W=23mm, H=26mm
8001-2	10W/m	L=600mm, W=23mm, H=26mm
8001-3	10W/m	L=1000mm, W=23mm, H=26mm

Order Options

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K 5

CRI

- >80 1
- >90 2
- >95 3

Beam Angle

- 10° 1
- 30° 2

Control

- ON-OFF 1
- ON-OFF (FLICKER FREE) 2
- DALI-2 3
- DALI-2 DT8 4
- DALI + 5
- D4i 6
- POE (Power Over Ethernet) 7



Mounting Type

Surface

Material Colour

- Black 1
- White 2
- Grey 3

Accessories


Product Order Code	Accessories Name	Accessories Image
8001-01 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Led	
8001-02	Lens	

Order Options

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

CRI

- >80 1
- >90 2
- >95 3