

P2 HORIZONTAL WALL GRAZER

Direct | Surface



P2 HORIZONTAL WALL GRAZER Luminaire in a sleek linear design with a durable aluminium housing and premium powder coating finish, developed for direct surface-mounted architectural lighting applications.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 80$, the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring reliable long-term performance. High-efficiency optics lens deliver a precise 45° beam angle for effective and uniform illumination.

With a standard size of 300mm length, 24.42mm width, and 49.5mm height, this fixture is designed for precise light distribution. With IP65 protection, it is suitable for professional indoor and outdoor architectural applications.

Customisations in RAL finish, wattage, and length are available as per project requirements, providing flexibility for different installation conditions and lighting applications. Divinity Lights offers customised lighting solutions according to specific client requirements.

Single Line Diagram

Surface Mounted

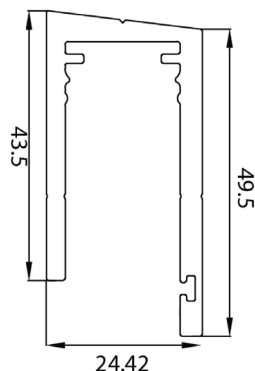

P2 HORIZONTAL WALL GRAZER



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP65

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K, 3000K, 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

45°

Optics

Lens

Efficacy

70lm/W

Electrical

Wattage - 10W/Mtr

Input Voltage- 24V DC

Physical Dimensions

Length- 300mm

Width - 24.42mm

Height- 49.5mm