

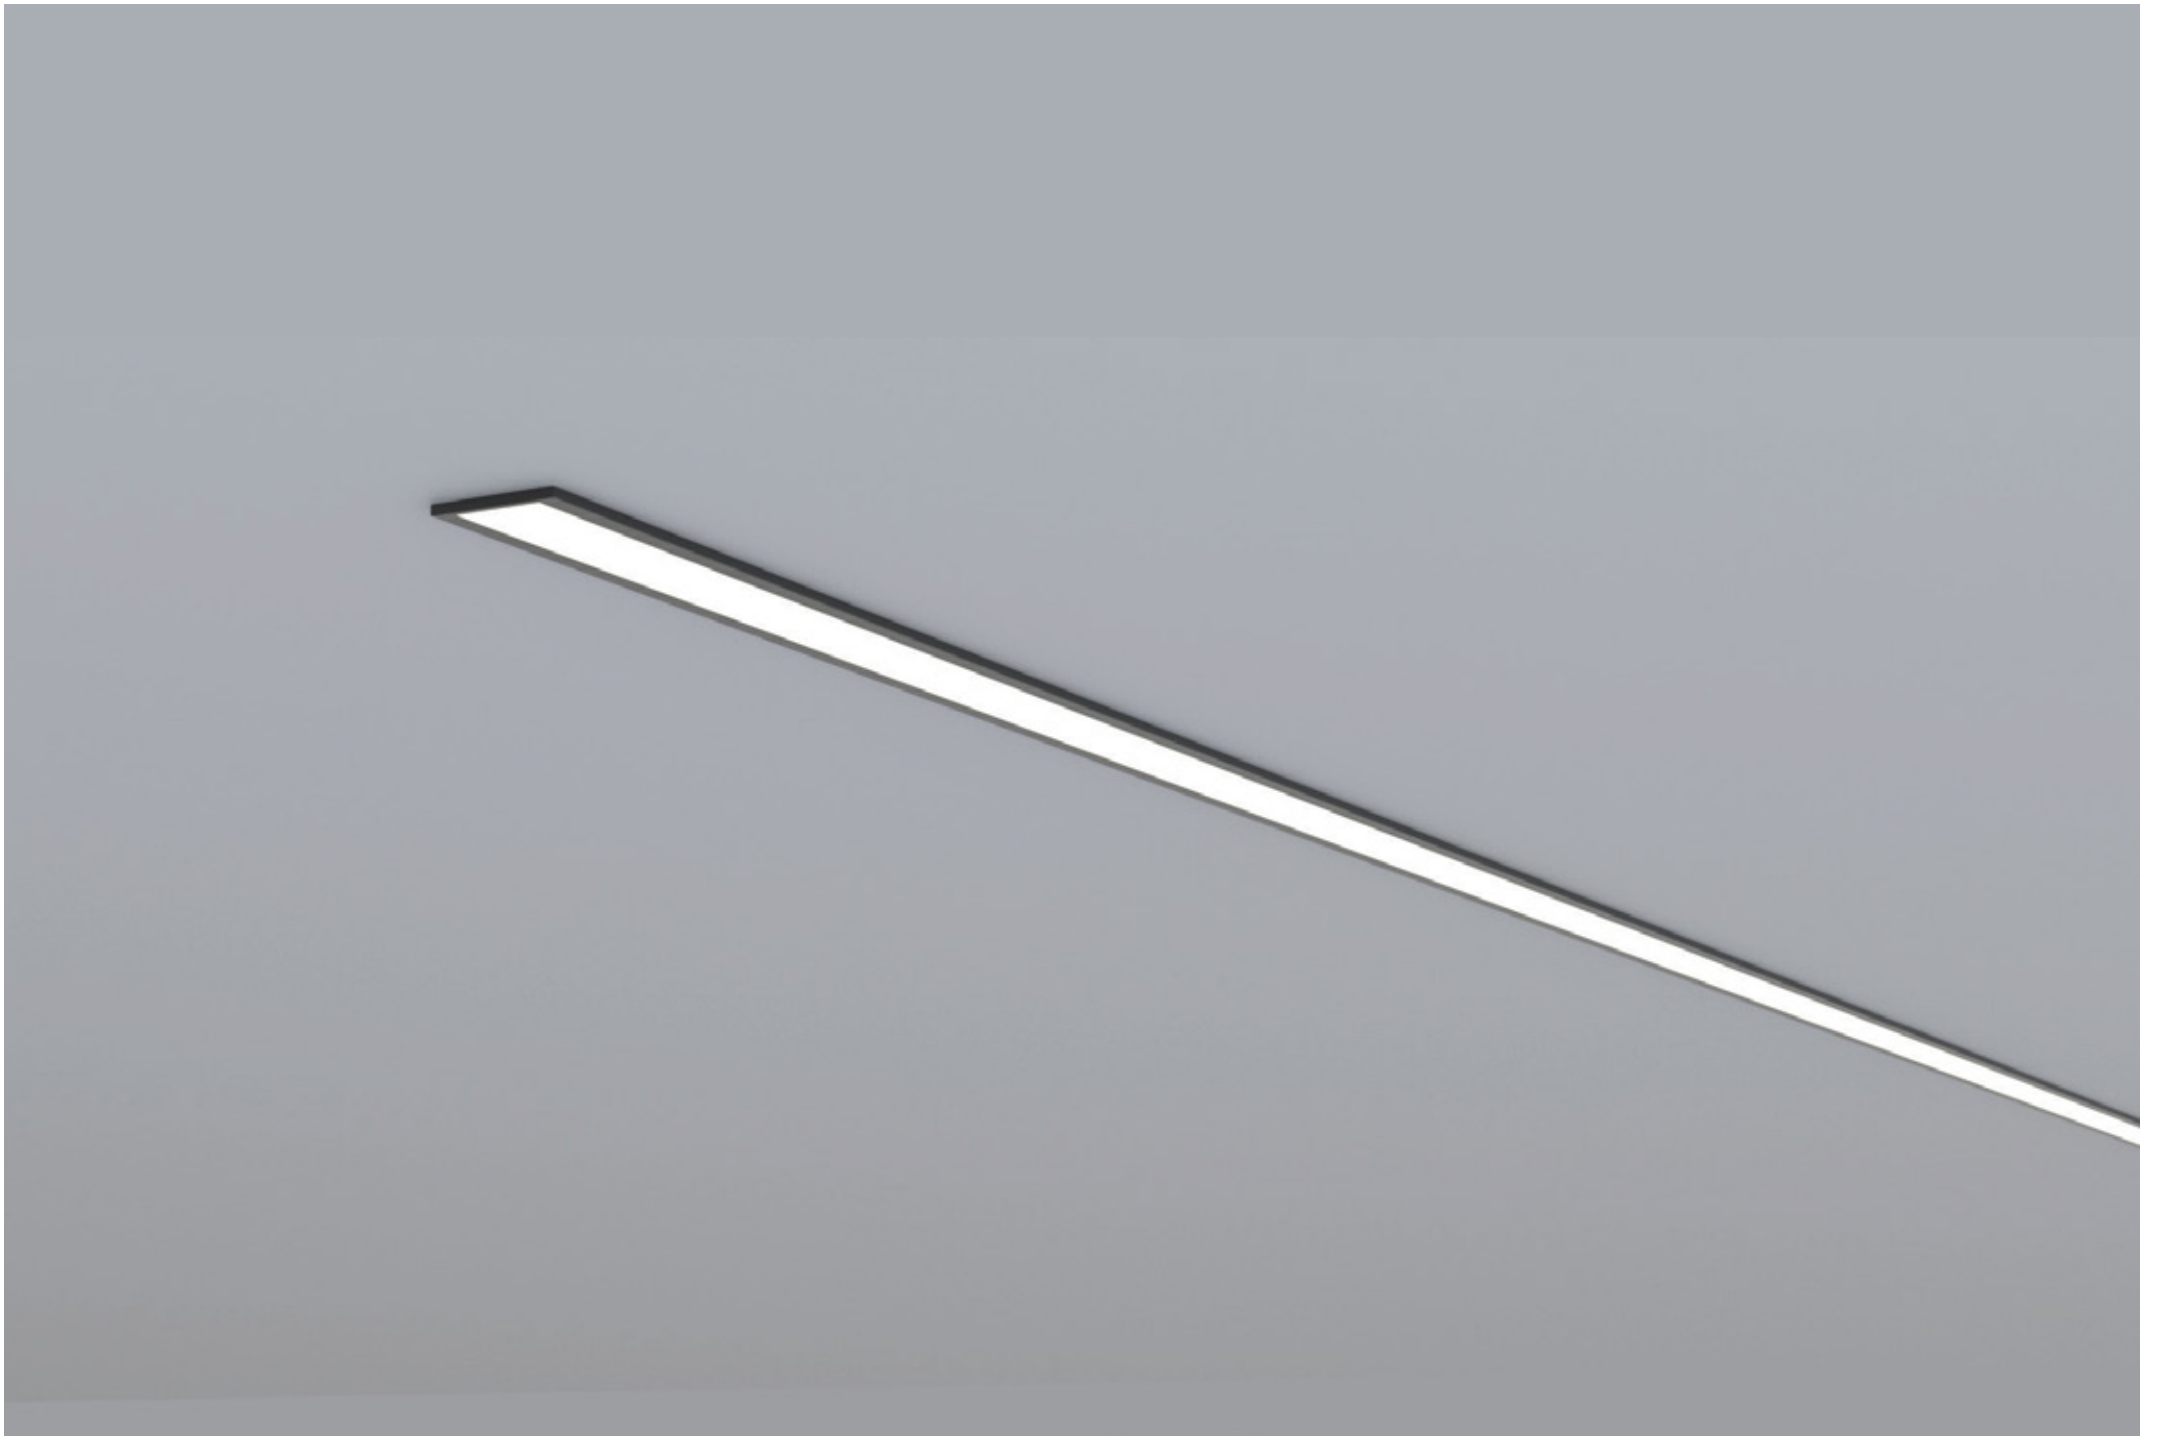





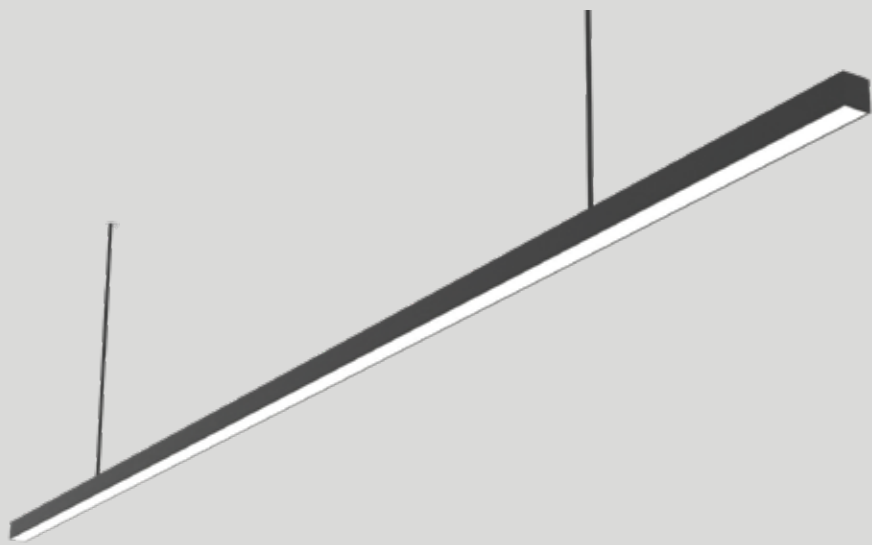

P2 KERYO WALL WASHER

P2 KERYO Wall Washer light features:

- Luminaire housing made of extruded aluminium
- Grazes walls vertically
- Accentuates surface textures better
- Reduces hotspots and dead zones
- Custom engineered
- Accommodates a wide range of wall heights
- Perfect longitudinal glare reduction
- Uniform illumination
- Energy efficient LED with effective colour rendering

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Wall Washer Optics

L70 @50,000h


Aluminium

Types



Pendant/ Surface/ Recessed

Single Line Diagram

Pendant/Surface



Recessed



CRI ≥ 90



TUNABLE
WHITE

P2 KERYO WALL WASHER



P2 KERYO WALL WASHER

System Power	Dimension
9W	L= 400mm
21W	L= 800mm
28W	L= 1200mm
56W	L= 2400mm

Order Options

CCT (Colour Temperature)

- 3000K
- 4000K
- 5700K
- Tunable White 2700K-6500K



CRI

>90

Beam Angle

Wall Washer (Asymmetric)

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI+



Mounting

Surface

Material Colour

RAL As Per Request