P2-2348
WALL GRAZER

Direct | Surface

P2- 2348 WALL GRAZER Luminaire in a sleek design with Extruded aluminium housing and with premium powder coating finish.

Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring long-term performance and reliability. High efficiency Lens and Tempered Glass optic delivers a precise beam 10°/ 30° options for uniform illumination and reduced glare.

With a standard size of 1000mm length, 24mm Width, and 48.9mm Height, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

Single Line Diagram

Surface

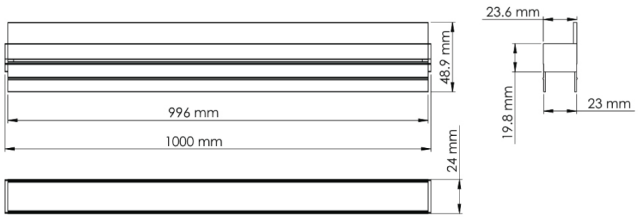

P2-2348 WALL GRAZER

INPUT VOLTAGE 24V DC | IP66 | CRI >80

Quick Info

Mounting Type
Surface

Material Colour
Customize RAL available

Protection mode
IP66

Driver Details
Non-Dimmable/ Dali-Dimmable/ DMX Controller
Power Factor (PF) -0.95
THD- <10%
UGR - <19

LED
CCT- 2700K, 3000K, 4000K, RGB, RGBW
CRI- ≥ 80
Life Span - L70@50000h
MacAdam - ≤3 SDCM

Beam Angle
10°/ 30°

Optics
Lens
Tempered Glass

Efficacy
80lm/W

Electrical
Wattage - 10W/Mtr
Input Voltage- 24V DC

Physical Dimensions
Length- 1000mm
Width - 24mm
Height- 48.9mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com