


P2-KERYO WALL WASHER

Direct | Surface

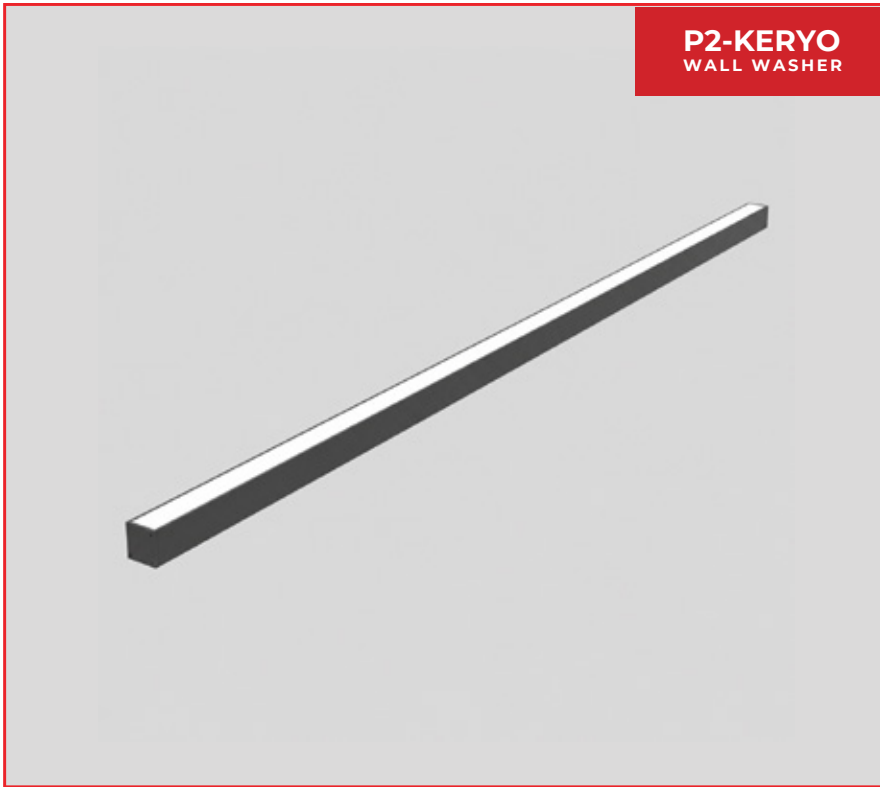

P2-KERYO WALL WASHER Luminaire in a sleek linear design with a durable aluminium housing and premium powder coating finish, developed for direct surface-mounted architectural lighting applications.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and $\text{CRI} \geq 80$, the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring reliable long-term performance. High-efficiency optics with Wall Washer Optic Diffuser deliver a precise Wall Washer Optic beam angle for effective and uniform illumination.

With a standard size of 1000mm length, 14.8mm width, and 15mm height, this fixture is designed for precise light distribution. With IP66 protection, it is suitable for professional indoor and outdoor architectural applications.

Customisations in RAL finish, wattage, and length are available as per project requirements, providing flexibility for different installation conditions and lighting applications. Divinity Lights offers customised lighting solutions according to specific client requirements.

Single Line Diagram

Surface Mounted



P2-KERYO WALL WASHER



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP66

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K, 3000K, 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

Wall Washer Optic

Optics

Wall Washer Optic Di user

Efficacy

70lm/W

Electrical

Wattage - 15W/Mtr

Input Voltage- 24V DC

Physical Dimensions

Length- 1000mm

Width - 14.8mm

Height- 15mm