


PETITE



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3


Lens

L70 @50,000h

Types

Recessed

Single Line Diagram

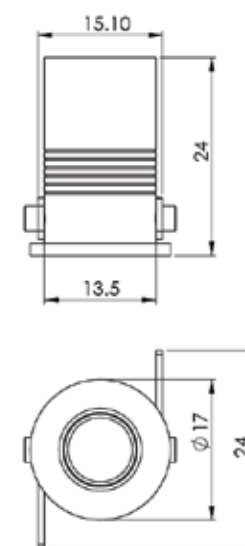

PETITE


PETITE Downlight features has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology with Lens
- Available in Fixed version
- Miniature TIR-lenses for jewellery shops, reading light.
- LED with effective colour rendering
- Each lens is mounted in a molded polycarbonate (PC) housing and attaches to the PCB by means of locating pins or optional mounting clips and is built to maintain its physical integrity over the usable life of the luminaire.
- Provides comfortable illumination with reduced eye strain, ideal for premium interiors.
- Delivers focused and controlled light distribution for accent
- Ensures excellent lumen output with low energy consumption.

360

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

PETITE



PETITE-17

System Power	Dimension
2W	Outer Dia- 17mm CutoutDia- 13.5mm Height- 24mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

25°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Material Colour

RAL As Per Request

Reflector Colour

Chrome