

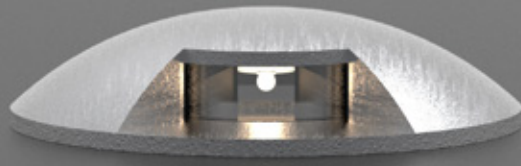


PLENIX-90/1
INGROUND LIGHTS



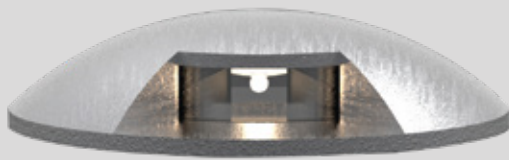

PLENIX-90/1

PLENIX-90/1 inground light has :

- Luminaire housing of stainless steel
- IP65, High Ingress Protection against dust & moisture
- Ideal heat dissipation with good quality heat sink
- One-way light distribution
- Beam angle 1-90°
- LED 3535/1 DOME
- Burial mounting
- Surge 2.5KV
- Uniform distribution of light in the outdoor environment
- High quality toughened glass to ensure the safety of the fixture

Quick Info

CRI ≥ 80

3000K, 4000K, 5700K

80 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Tempered Glass


L70 @50,000h

SS

Types

Inground

Single Line Diagram

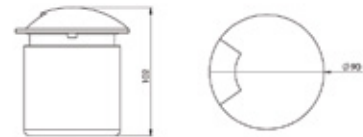

CRI ≥ 80

PLENIX-90/1



System Power	Dimensions
2.5W	Outer Dia- 90mm, Height-102mm

Order Options

CCT (Colour Temperature)

- 3000K
- 4000K
- 5700K

CRI

- >80

Beam Angle

- 90°

Control

- Non Dimmable
- Dali Dimmable

Mounting Type

- Inground

Material Colour

- RAL as per request