

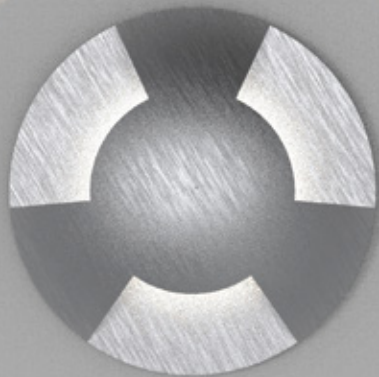



PLENIX-90/3
INGROUND LIGHTS



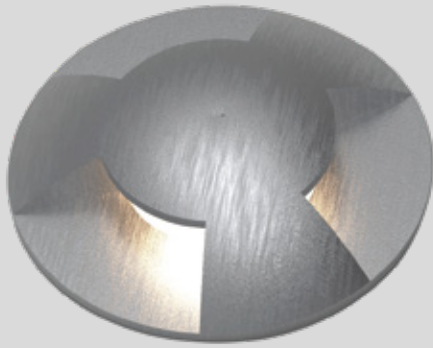

PLENIX-90/3

PLENIX-90/3 inground light has :

- Luminaire housing of stainless steel
- IP67, High Ingress Protection against dust & moisture
- Ideal heat dissipation with good quality heat sink
- Three-way light distribution
- Beam angle 3-90°
- LED 3535/2 DOME
- Burial mounting
- Surge 2.5KV
- Uniform distribution of light in the outdoor environment
- High quality toughened glass to ensure the safety of the fixture

Quick Info

CRI ≥ 80

3000K, 4000K, 5700K

80 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Tempered Glass


L70 @50,000h

SS

Types


Inground

Single Line Diagram

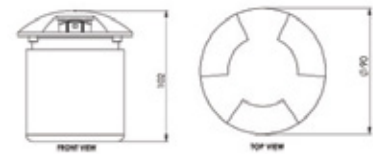

CRI ≥ 80

PLENIX-90/3



System Power	Dimensions
4W	Dia- 90mm, H- 102mm

Order Options

CCT (Colour Temperature)

- 3000K
- 4000K
- 5700K

CRI

- >80

Beam Angle

- 90°X3

Control

- Non Dimmable
- Dali Dimmable

Mounting Type

- Inground

Material Colour

- RAL as per request