
# PROXIMA
## WALL LIGHTS

Direct | Surface(Direct-Indirect)

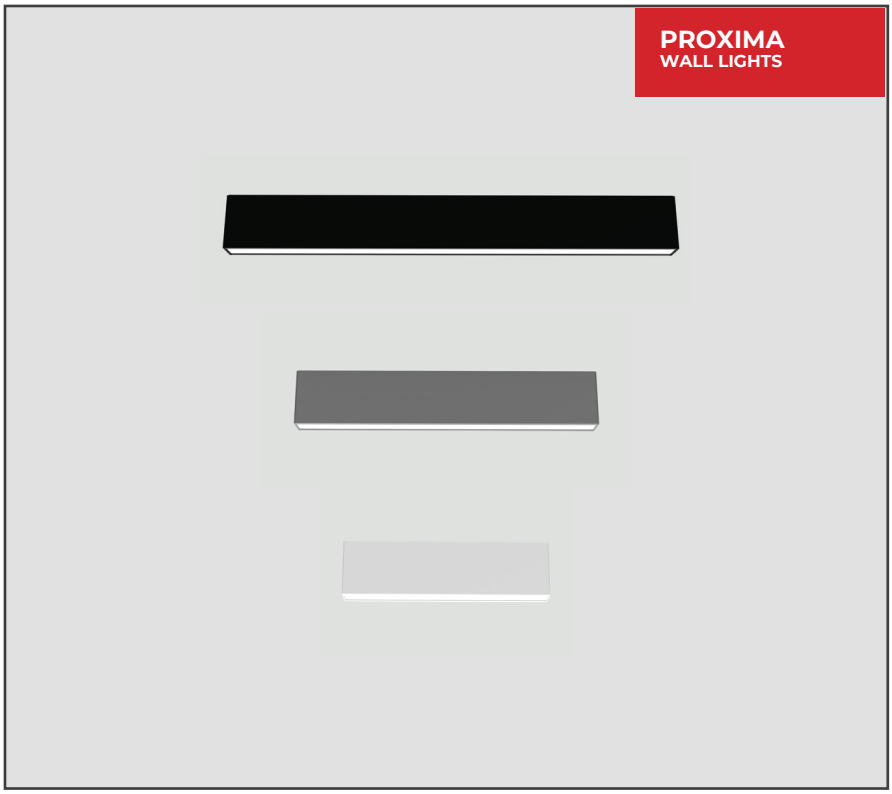


**PROXIMA WALL LIGHT** luminaire features a sleek, modern design crafted from aluminium die-cast housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, this fixture ensures excellent color rendering and long-lasting performance. It maintains at least 70% of its luminous flux after 50,000 operating hours, guaranteeing durability and reliability over time. The high-efficiency **Opal Diffuser** delivers a soft, uniform 120° beam ideal for outdoor wall-mounted applications, providing cozy, glare-free downward illumination. With IP65-rated waterproof construction and high power LED neon light with top bend feature is perfect for entrances, terraces, and architectural facades.

With a standard size of 1000mm length, 80mm height, and 40mm width, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

## Single Line Diagram

Surface Mounted

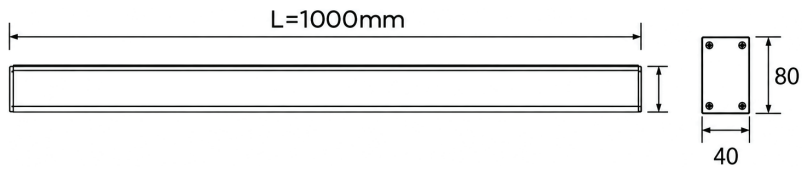


## PROXIMA WALL LIGHTS

INPUT VOLTAGE 220-240V AC | IP65 | CRI >80

# Quick Info

### Mounting Type
Surface(Direct-Indirect)

### Material Colour
Customize RAL available

### Protection mode
IP65

### Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

### LED
**CCT-** 2700K/ 3000K/ 4000K

**CRI-** ≥ 80

**Life Span** - L70@50000h

**MacAdam -** ≤3 SDCM

### Beam Angle
120°

### Optics
Opal Diffuser

### Efficacy
80lm/W

### Electrical
**Wattage -** 20W

**Opt wattages available-** 10W/ 15W

**Input Voltage-** 220-240V AC

### Physical Dimensions
**Length-** 1000mm

**Height-** 80mm

**Width-** 40mm

divinity lights

**Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.**

www.divinitylights.com