
PROXIMA
WALL LIGHTS

Direct | Surface

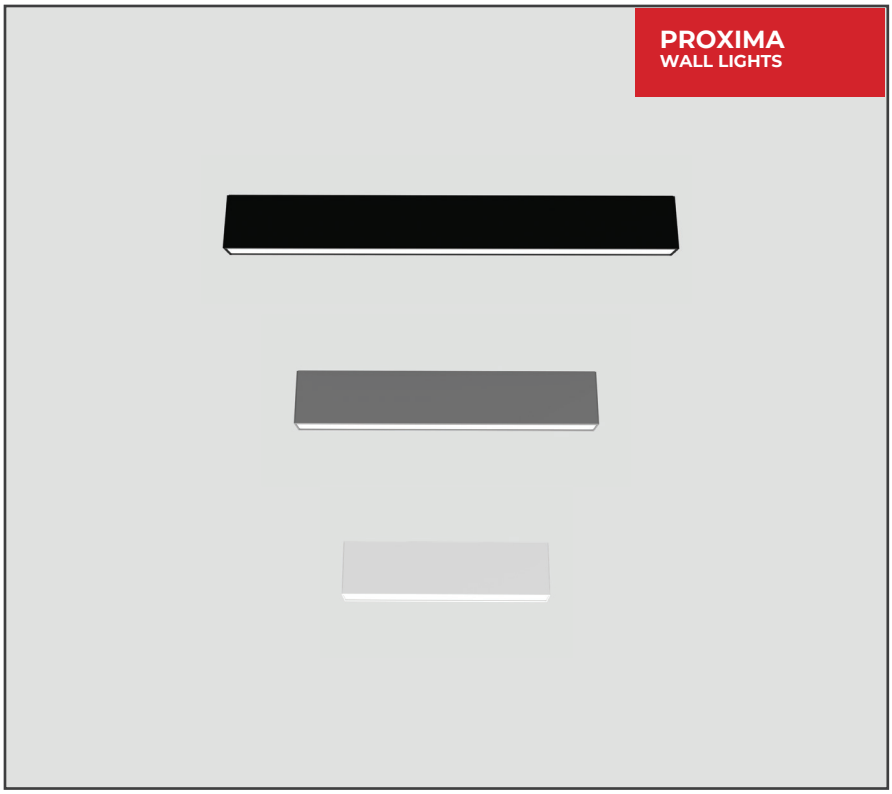

PROXIMA WALL LIGHT luminaire features a sleek, modern design crafted from aluminium die-cast housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, this fixture ensures excellent color rendering and long-lasting performance. It maintains at least 70% of its luminous flux after 50,000 operating hours, guaranteeing durability and reliability over time. The high-efficiency **Opal Diffuser** delivers a soft, uniform 120° beam ideal for outdoor wall-mounted applications, providing cozy, glare-free downward illumination. With IP65-rated waterproof construction and high power LED neon light with top bend feature is perfect for entrances, terraces, and architectural facades.

With a standard size of 1000mm length, 80mm height, and 40mm width, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

Single Line Diagram

Surface Mounted

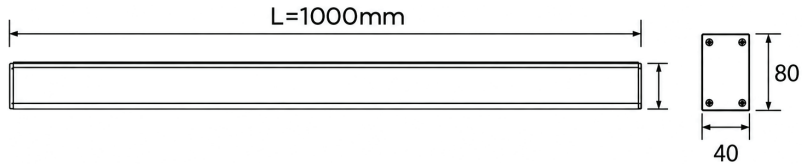

PROXIMA WALL LIGHTS

INPUT VOLTAGE 220-240V AC | IP65 | CRI >80

Quick Info

Mounting Type
Surface

Material Colour
Customize RAL available

Protection mode
IP65

Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2700K/ 3000K/ 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
120°

Optics
Opal Diffuser

Efficacy
80lm/W

Electrical
Wattage - 20W

Opt wattages available- 10W/ 15W

Input Voltage- 220-240V AC

Physical Dimensions
Length- 1000mm

Height- 80mm

Width- 40mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com