


RING
CATENARY LIGHT

divinity lights

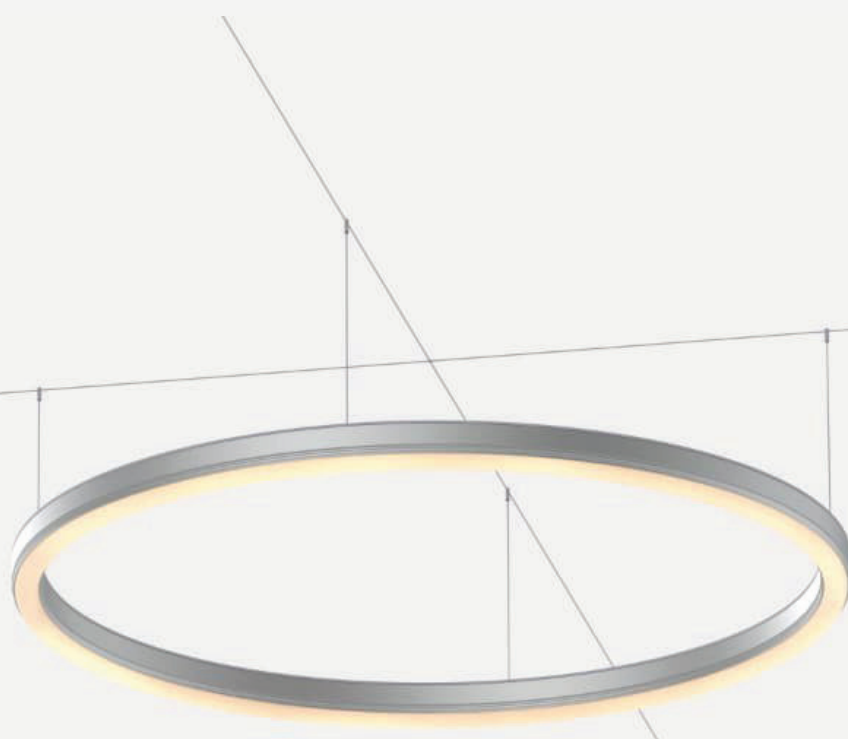

Quick Info

CRI $\geq$ 80

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Potted Diffuser


L70 @50,000h

Aluminium Die-Cast

Type

Catenary


Single Line Diagram

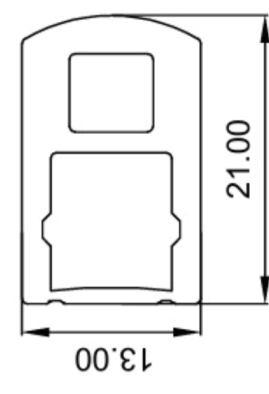

RING CATENARY LIGHT

Ring Catenary Light has :

- Luminaire housing of Aluminium
- Catenary Mounted
- Multiple options of antiglare and decorative
- Zero multiple shadows
- Various beam angle 120°
- LED with effective colour rendering
- Interpretation of the real environment light
- Finned heat sinks to dissipate heat and increase performance



CRI $\geq$ 80

RING CATENARY LIGHT



System Power	Dimensions
24W	Dia= 400mm, H= 21mm
35W	Dia= 600mm, H= 21mm
50W	Dia= 900mm, H= 21mm
70W	Dia= 1200mm, H= 21mm

Order Options

CCT (Color Temperature)

2700K
3000K
4000K

CRI

>80

Beam Angle

120°

Control

Non-Dimmable
Dali- Dimmable



Mounting Type
Catenary

Material Color

RAL code as per request