

ROMA-RF 18

Direct | Surface

ROMA-RF 18



ROMA - RF-18 Luminaire housing of aluminum with premium powder coating finish.


Powered by high-quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long-term reliability. Optics of high efficiency lens & transparent PMMA Diffuser for uniform light distribution.

With a size of 655mm Dia, and 1972mm height, this fixture is crafted for direct or direct light distribution making it ideal for professional applications. Numerous combination of lamp Head design for vriety of desks.

Customisations in RAL finish, Wattages available as per request to enhance installation and functionality.

Single Line Diagram

Surface Mounted

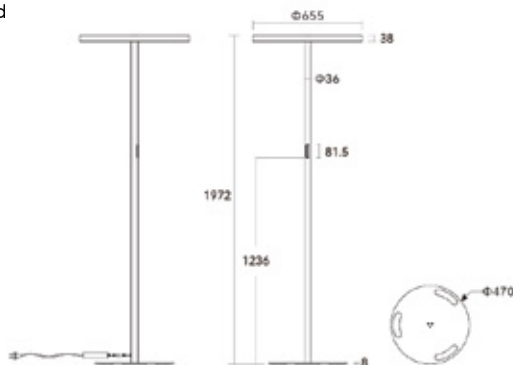

ROMA-RF 18



Quick Info

Mounting Type

Surface

Material Colour

Powder Coated (Grey)

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

Downside-60°/ Upside-115°

Optics

Lens

PMMA Diffuser

Efficacy

3000- XXXX

4000- XXXX

5700- XXXX

Tunable White 2700K-6500K-

Electrical

Wattage - 18W

Input Voltage- 220-240 VAC

Light Distribution

Direct - Down 100%

Physical

Dia- 655mm

Height- 1972mm