

ROMA RF




Quick Info

CRI ≥ 90
3000K/ 4000K/ 5700K
ON-OFF/ON-OFF (FLICKER FREE)
DALI-2 DT6, DALI-2 DT8
SDCM<3
PMMA Diffuser & Lens
L70 @50,000h

Types

Floor Surface

Single Line Diagram

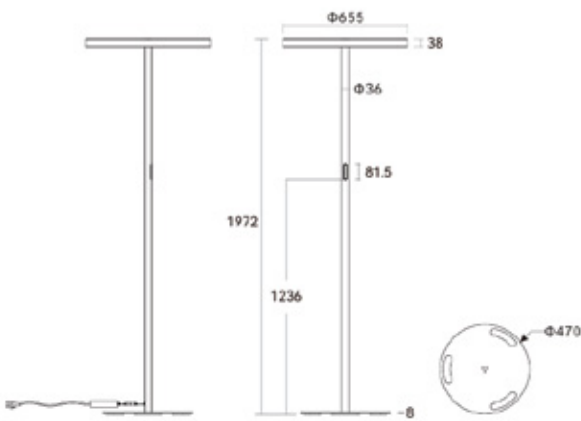

ROMA RF

Roma RF light features has:

- Compact and quality appearance, patent design with rich texture and visual impact
- High lumen e ciency reach to 150lm/W, tting with a 1800lm direct and 13200lm indirect lights, total 15000lm lumen output
- Direct and indirect light control Individually
- Uniform illumination
- 115°(Indirect) beam angle
- It can realize 60°(Direct)
- beam angle and perfect light cutoffOpen-plan office, individual office, etc.
- LED Profiles made of aluminium to add a premium look



CRI ≥90

ROMA RF



ROMA RF (DIRECT)

System Power	Dimension
15W	Dia= 655mm H= 1972mm
18W	Dia= 655mm H= 1972mm

ROMA RF (DIRECT-INDIRECT)

System Power	Dimension
60W	Dia= 655mm H= 1972mm
100W	Dia= 655mm H= 1972mm

Order Options

CCT (Colour Temperature)	
2700K available in 10,15, & 22 watts	1
3000K	2
4000K	3
6000K	4

CRI	
>90	1

Beam Angle

Downside-60°
Upside-115°

Control	
ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2 DT6	3
DALI-2 DT8	4

VOLTAGE

24V DC

Mounting

Floor Surface