


## ROMEE-RF 40

Direct | Floor Surface

## ROMEE-RF 40

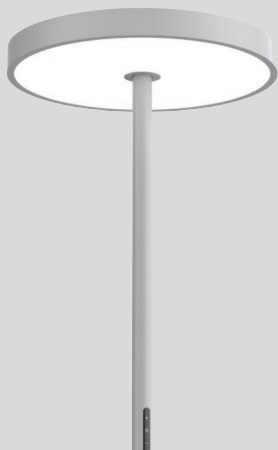

ROMEE- RF 40 Luminaire housing of aluminum with premium powder coating finish.


Powered by high-quality LED's with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long-term reliability. Optics of high efficiency PC Diffuser & PMMA Diffuser for uniform light distribution.

With a size of 500mm Dia, and 1980mm height, this fixture is crafted for direct or direct light distribution making it ideal for professional applications. Numerous combination of lamp Head design for vriety of desks.

Customisations in RAL finish, Wattages available as per request to enhance installation and functionality.

### Single Line Diagram

Surface Mounted

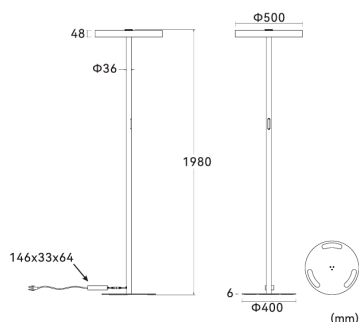

## ROMEE-RF 40



## Quick Info

### Mounting Type

Floor Surface

### Material Colour

Powder Coated (Grey)

### Protection mode

IP40

### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

### Beam Angle

Downside-90°/ Upside-115°

### Optics

PC Diffuser

PMMA Diffuser

### Efficacy

3000K- XXXX

4000K- XXXX

5700K- XXXX

Tunable White 2700K-6500K-

### Electrical

Wattage - 40W

Input Voltage- 220-240 VAC

### Physical

Dia- 500mm

Height- 1980mm