

ROMEE RF



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

On-OFF, DALI-2 DT6, DALI-2 DT8

SDCM<3



PMMA & PC Diffuser

L70 @50,000h

Types

Floor Surface


Single Line Diagram

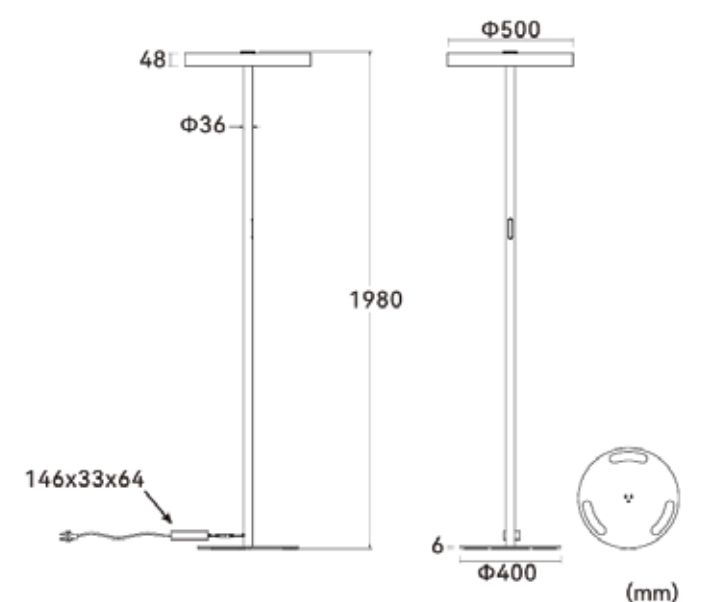

ROMEERF

Romee RF features has:

- External driver with integrated light pole
- Conductive pin design makes installation more convenient
- High light efficiency, low glare
- Optional for dimming and CCT change version
- $L_{max} \geq 65^\circ < 3000 \text{cd/m}^2$
- Slim lamp cap 48mm



CRI ≥ 90

ROMEE RF



ROMA RF (DIRECT)

System Power	Dimension
40W	Dia= 500mm H= 1980mm

ROMEE RF (DIRECT-INDIRECT)

System Power	Dimension
80W	Dia= 50mm H= 1980mm

Order Options

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3

CRI	
>90	1

Beam Angle

Downside-90°
Upside-115°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4

VOLTAGE

24V DC

Mounting

Floor Surface