
SHINE BENDING LED STRIP

Direct | Surface

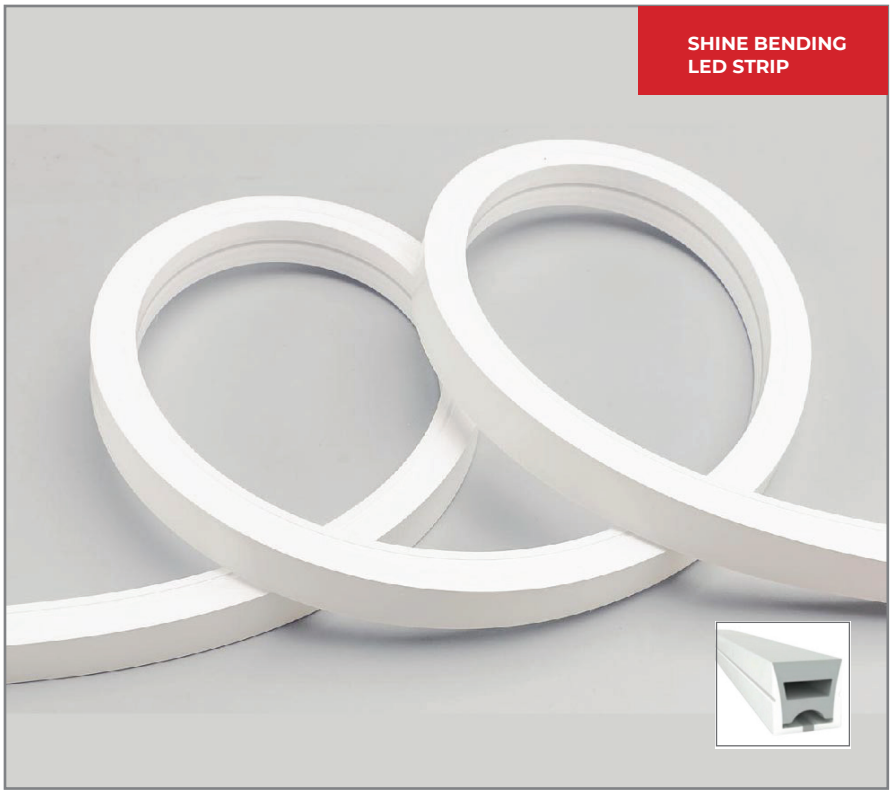

SHINE BENDING LED STRIP Ultra-flexible top-bend LED strip lighting designed for seamless curves and architectural freedom. Featuring a slim profile, it delivers dot-free, homogeneous illumination with high-density LED arrays for smooth, uninterrupted light flow. Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90, it ensures excellent color accuracy and consistency across the entire run. The strip maintains at least 70% of its luminous flux after 50,000 operating hours for long-term reliability.

Compatible with DALI-2 DT6/ DALI-2 DT8 and flicker-free ON-OFF control, it's ideal for advanced lighting environments. A wider luminous surface with no dark edges enhances both visual comfort and aesthetics. Easy to cut, install, and customize on-site using adhesive tape, Shine Bending LED Strip is ideal for surface applications with smooth curves and clean finishes.

Customisations in control type, length, and color sequencing are available on request to meet specific project needs.

Single Line Diagram

Surface

SHINE BENDING LED STRIP



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL avilable

Protection mode

IP40

Driver Details

DALI-2 DT6/ DALI-2 DT8

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 6000K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle

180°

Optics

LED Strip

Efficacy

3000K- XXXXX

4000K- XXXXX

6000K- XXXXX

Electrical

Wattage - 18W/Mtr

Input Voltage- 24V DC

Physical Dimensions

Customize

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com