


SHINE COB PRO STRIP

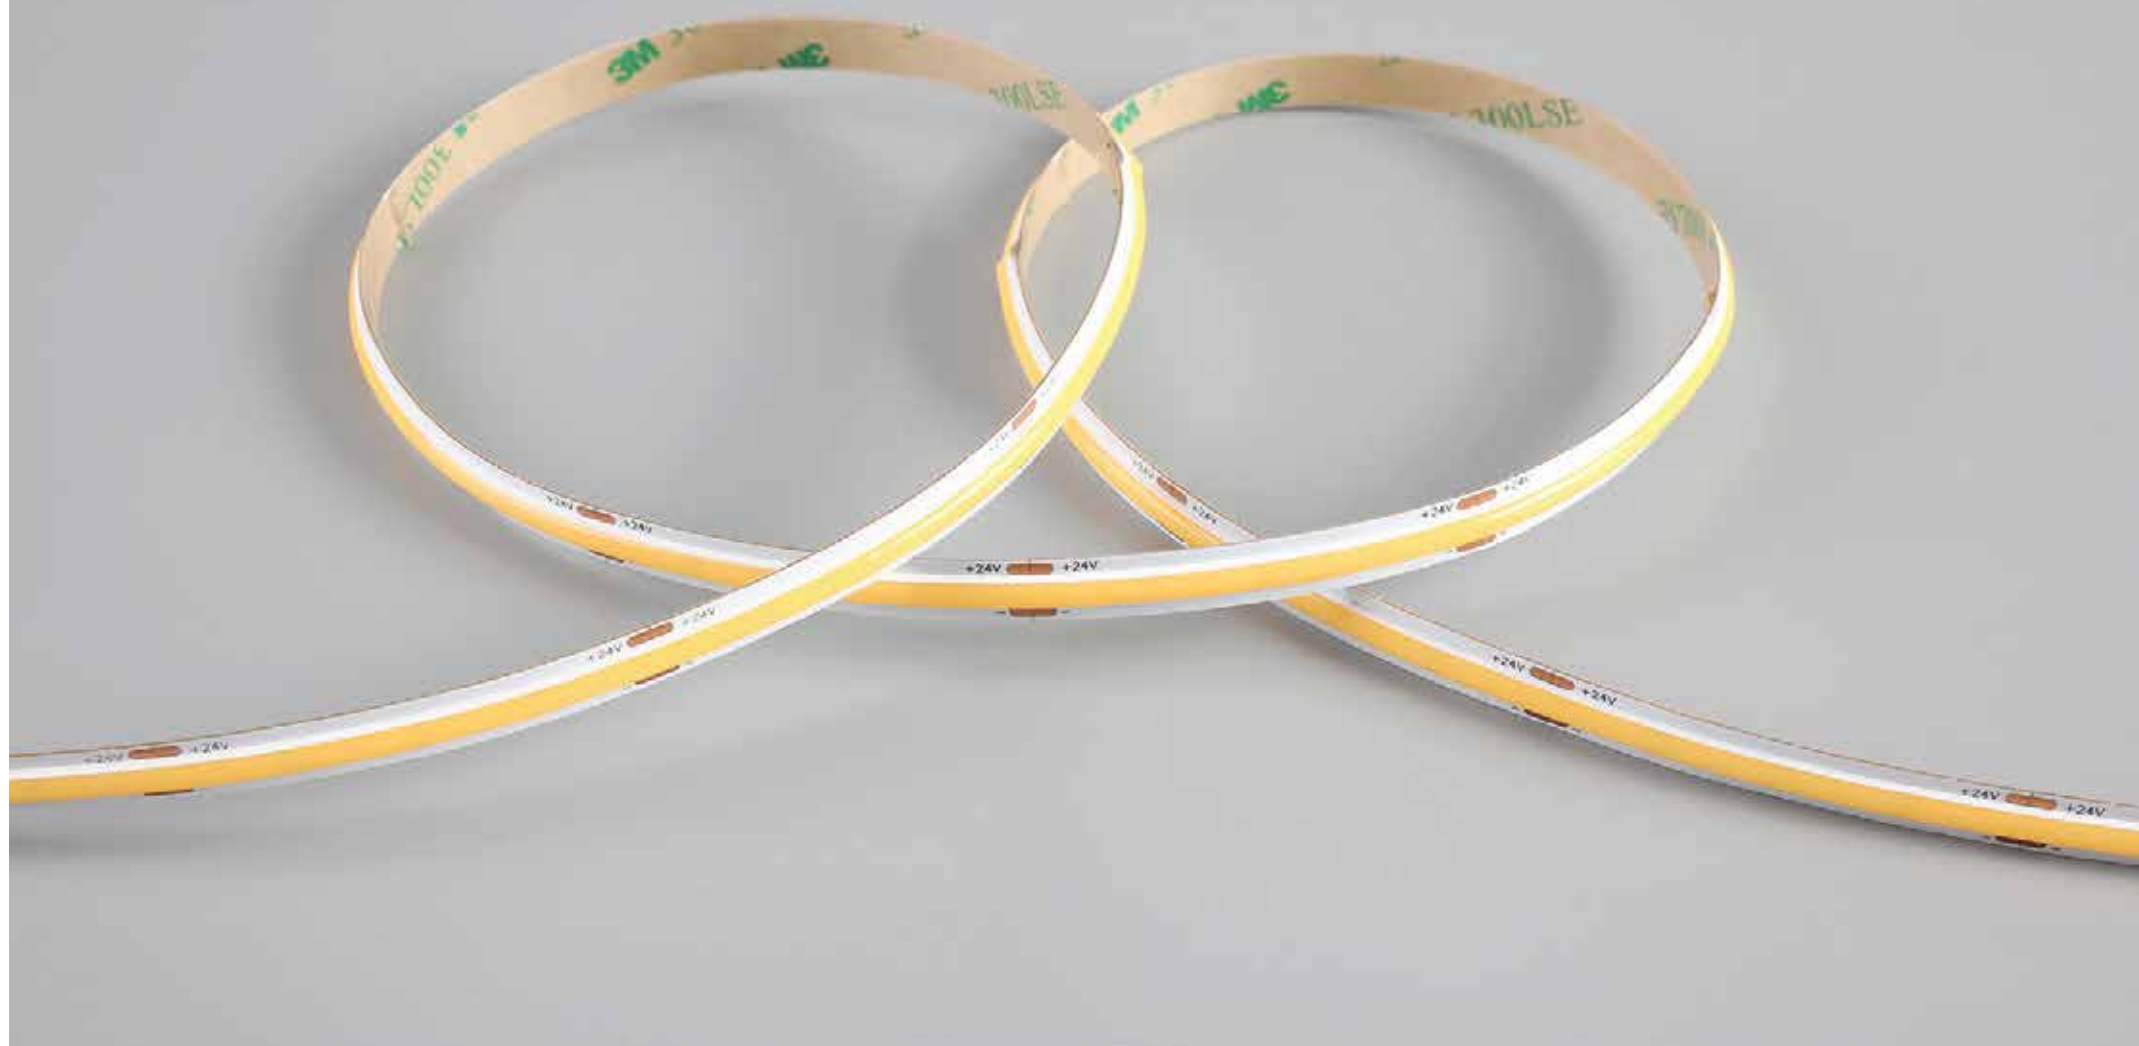

Quick Info

CRI ≥ 90

3000K-4000K

2700K-6500K



DALI-2 DT6 / DALI-2 DT8

SDCM < 3

L70 @50,000h

Types


Surface



SHINE COB PRO STRIP

This strip light features has:

- With a wider PCB, make an ultra-wide luminous surface, higher power, and higher luminous flux.
- High positioning, high reliability, ultra-thin appearance, and super flexible bending.
- Homogeneous and soft linear lighting performance.
- Adopting an exclusively designed protective structure, with excellent bending resistance, strong reliability, and stable quality.
- Use thick copper that is superior to products on the market, to ensure consistency in voltage and brightness for the entire reel.



CRI ≥ 90







TUNABLE
WHITE



SHINE COB PRO STRIP



SHINE COB PRO STRIP

Product Order Code	System Power	Dimension
7003-  1	15W/MTR	8mm PCB 
7003-  2	15W/MTR	8mm PCB 

Order Options

CCT (Colour Temperature)	
TUNABLE 2700K-6700K	 1
TUNABLE 3000K-4000K	 2

CRI	
>90	 1

Beam Angle

110°

Control	
DALI-2 DT8	 1

VOLTAGE

24V DC

Mounting

Surface

