
SHINE

Direct | Surface

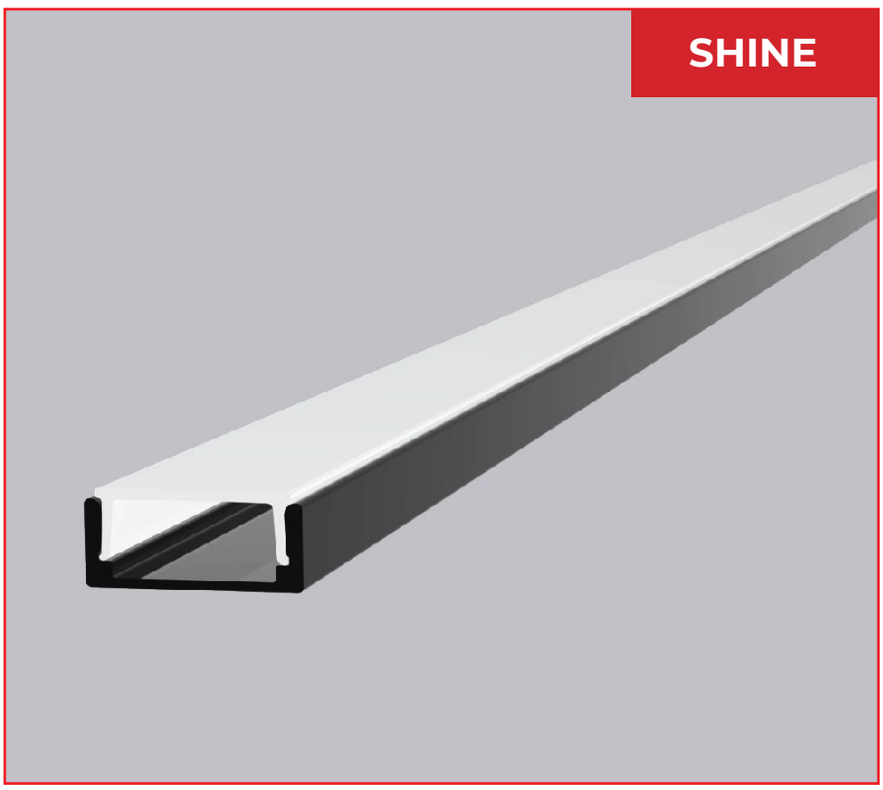

SHINE Linear Luminaire in a sleek design with a slim Extruded aluminium housing and with premium powder coating finish.

Powered by high-quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long-term reliability. High efficiency PMMA Diffuser with 24° beam angle.

With a standard size of 1000 mm length, 6 mm height and 15 mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages, Length and Diffuser option available as per request to enhance installation and functionality.

Single Line Diagram

Surface

SHINE



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL avilable

Protection mode

IP40

Driver Details

ON/OFF/ DALI-2 DT6/ DALI-2 DT8/ DALI+

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle

110°

Optics

PMMA Diffuser

Efficacy

3000K- XXXXX

4000K-XXXXX

5700K- XXXXX

Tunable White 2700K-6500K- XXXXX

Electrical

Wattage - 18W/Mtr

Opt Wattage Available - 24V DC

Input Voltage- 24V DC

Physical Dimensions

Lenght- 1000mm

Width- 15mm

Height- 6mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com