



SLIM RING

divinity lights



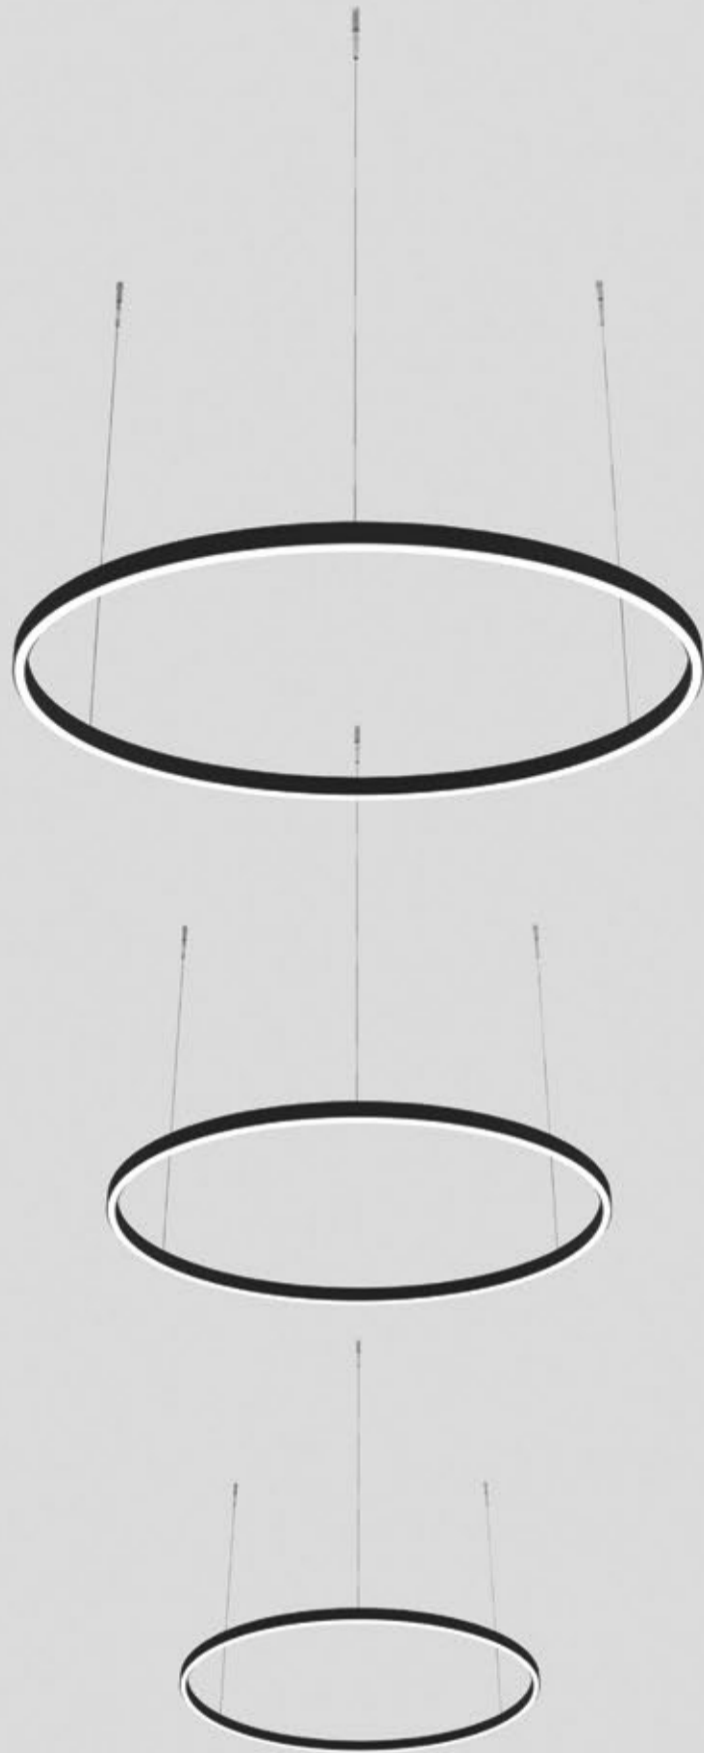

SLIM RING

Slim Ring fixture has :

- Sleek and slim Ring with 20mm height
- Aluminium Housing
- Premium Finish Powder coating
- High efficiency PMMA diffuser
- Uninterrupted and uniform ring of LED light
- Halo of light around the ceiling
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

PMMA Diffuser



L70 @50,000h

Aluminium


Types

Pendant


Single Line Diagram



Ø400




Ø600



Ø1000

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

SLIM RING



SLIM RING

System Power	Dimensions
30W	Dia = 400mm, H- 20mm
50W	Dia = 600mm, H- 20mm
70W	Dia = 1000mm, H- 20mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Pendent

Material Color

RAL As Per Request

Photometric Details

