
TWIN'B- 200
WALL LIGHTS

divinity lights









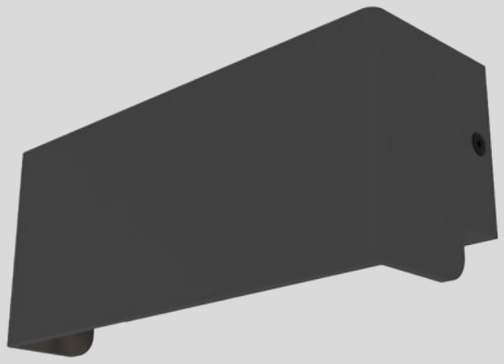









TWIN'B-200

TWIN'B-200 walllight has :

- Luminaire housing made of Aluminium die-cast
- Modern surface LED wall light
- Great solution to most pathways & external walls
- Soft downward illumination for the walkway
- Lamp provides a cosy downward light for outdoor and indoor spaces
- Good amount of light for entrance areas, front door and terrace
- Waterproof rating of IP65
- Beam angle of 15°,17°,35°,55°,15*50°

divinity lights

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

80 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens


L70 @50,000h


Aluminium Die cast


Types

Wall Surface

Single Line Diagram








CRI ≥ 80

divinity lights

TWIN'B-200



TWIn'B (Direct-Indirect)

System Power	Dimensions
20W	L- 200mm, W-85mm H- 65mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>80

Beam Angle

15^{0}
17^{0}
35^{0}
55^{0}
15*50^{0}

Control

Non Dimmable
Dali Dimmable

Mounting Type

Wall Surface

Material Colour

RAL as per request