
TWIN'B-200
WALL LIGHT
Direct | Surface

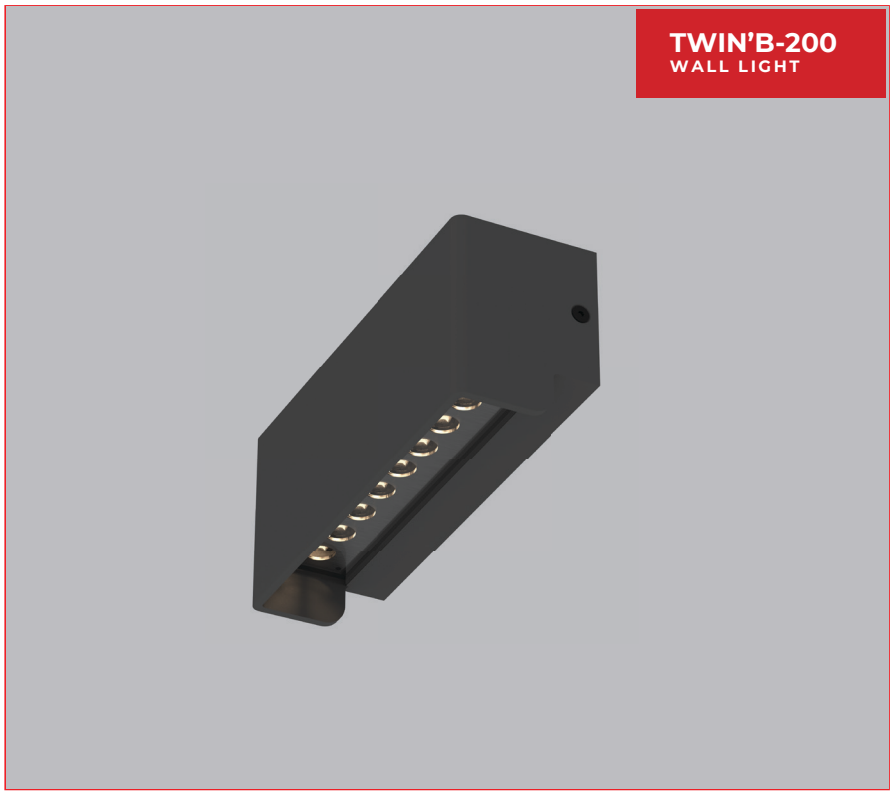

TWIN'B-200 WALL LIGHT by Divinity Lights is a compact and contemporary wall-mounted architectural luminaire designed to create a striking up-and-down lighting effect on exterior surfaces. Its robust housing with customizable RAL colour options complements modern architectural environments while providing both functional and decorative illumination.


Powered by high-quality LEDs with CRI ≥80, available in 2700K, 3000K and 4000K, the luminaire delivers efficient performance at 80 lm/W with multiple beam-angle options of 15°/ 17°/ 35°/ 45°/ 55° and 15°*50°. With IP65 protection, it is suitable for outdoor applications and is available with non-dimmable or DALI-dimmable driver options.

Measuring 200 × 85 × 65 mm, TWIN'B-200 is designed for direct wall-surface mounting. Its focused upward and downward illumination makes it suitable for building façades, entrance walls, exterior corridors, terraces, balconies, hospitality spaces, pathways and architectural feature walls, creating an elegant wash of light while enhancing the character of the structure.

Divinity Lights provides customized lighting solutions according to the specific requirements of each project, including suitable colour finishes, lighting performance and application needs.

Single Line Diagram

Surface Mounted

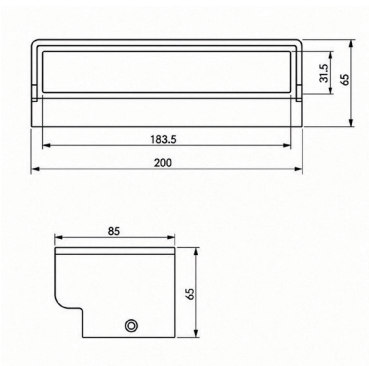

TWIN'B-200 WALL LIGHT



Quick Info

Mounting Type
Wall Surface

Material Colour
Customize RAL available

Protection mode
IP65

Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2700K, 3000K, 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
15°/ 17°/ 35°/ 45°/ 55°/ 15°*50°

Optics
Lens

Efficacy
80lm/W

Electrical
Wattage - 20W

Input Voltage- 220-240V AC

Physical Dimensions
Length- 200mm

Width - 85mm

Height- 65mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com