

**UNIK OUTER
LIT RING**

divinity lights




Quick Info

CRI ≥ 90
3000K/ 4000K/ 5700K
Tunable white (2700K-6500K)
ON-OFF/ON-OFF (FLICKER FREE)
DALI-2 DT6 / DALI-2 DT8/ DALI+
SDCM<3
PMMA Diffuser
L70 @50,000h
Aluminium

Types

Pendant


Single Line Diagram

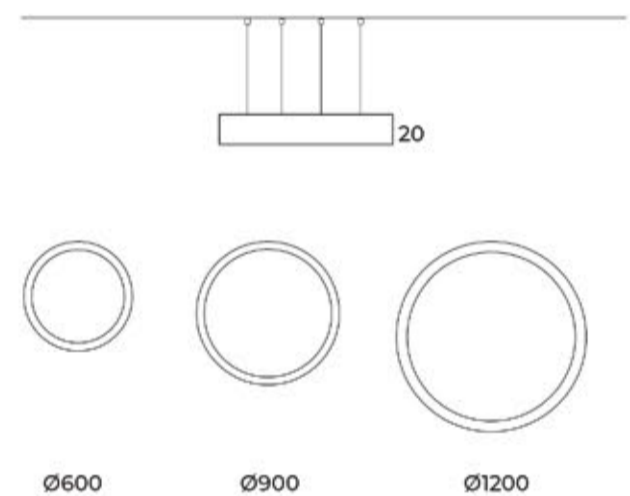

UNIK OUTER LIT RING

Unik Outer Lit Ring has :

- Outer lit ring with 20mm height
- Aluminium luminaire Housing
- Premium Finish Powder coating
- LED PCB mounted
- Bottom opening for easy maintenance
- Pendant with cable suspension
- Quick mounting system
- M6 bolt for M6 fastener
- Creates a beautiful scenery of lighting
- Uniform illumination
- Energy-efficient LED with color rendering



CRI ≥ 90



TUNABLE
WHITE

UNIK OUTER LIT RING



UNIK OUTER LIT RING

System Power	Dimensions
30W	Dia = 600mm, H= 20mm, Profile Thickness= 8mm
50W	Dia = 900mm, H= 20mm, Profile Thickness= 8mm
70W	Dia = 1200mm, H= 20mm, Profile Thickness= 8mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Pendent

Material Color

RAL As Per Request