


## UNIK OUTER LIT RING

Direct | Pendant

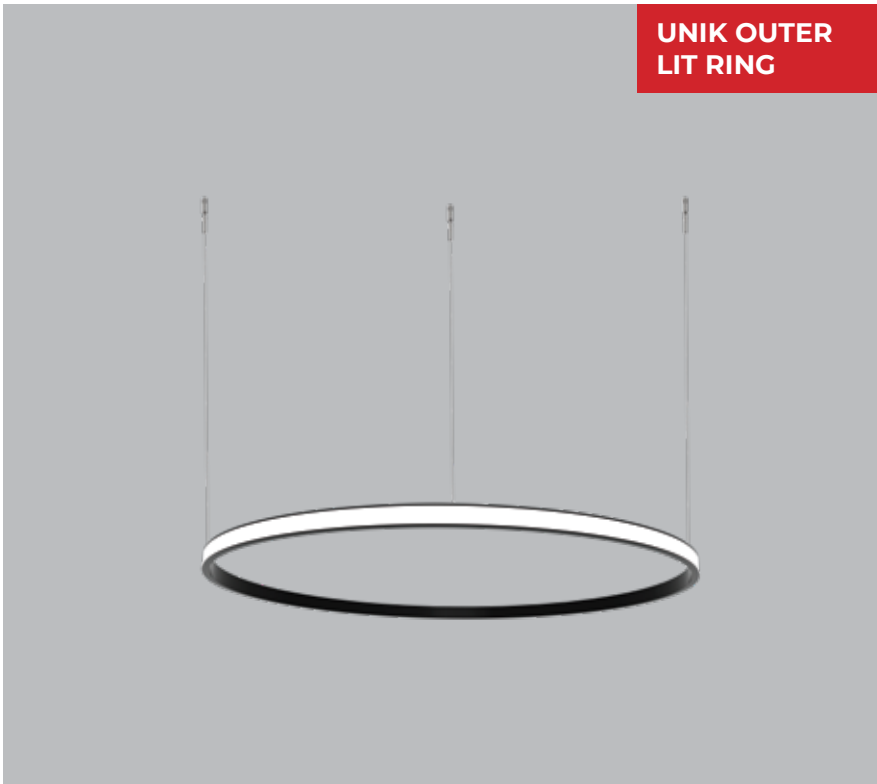

**UNIK OUTER LIT RING** is sleek and slim circular led Ring luminaire in aluminium housing and with premium powder coating finish.



Powered by high quality LED's with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency PMMA diffuser provides uniform illumination.

### FOR 1200mm Disc

Available in 1200mm diameter, height of 20mm and profile of thickness 8mm, this fixture is crafted for side lit light distribution making it ideal for professional and decorative applications.

Customisations in RAL finish, Wattages and Dimensions available as per request to enhance installation and functionality.

### Single Line Diagram



## UNIK OUTER LIT RING



### Quick Info

#### Mounting Type

Pendant

#### Material Colour

Customize RAL available

#### Protection mode

IP40

#### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

#### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

#### Beam Angle

110°

#### Optics

Opal Diffuser

#### Efficacy

3000K- 97.5

4000K- 124.5

5700K- 137.1

Tunable White 2700K-6500K- 124.5

#### Electrical

Wattage -70W

Input Voltage- 220-240 VAC

#### Physical Dimensions

Dia-  $\varnothing$ 1200mm

Height- 20mm

Profile Thickness- 8mm