

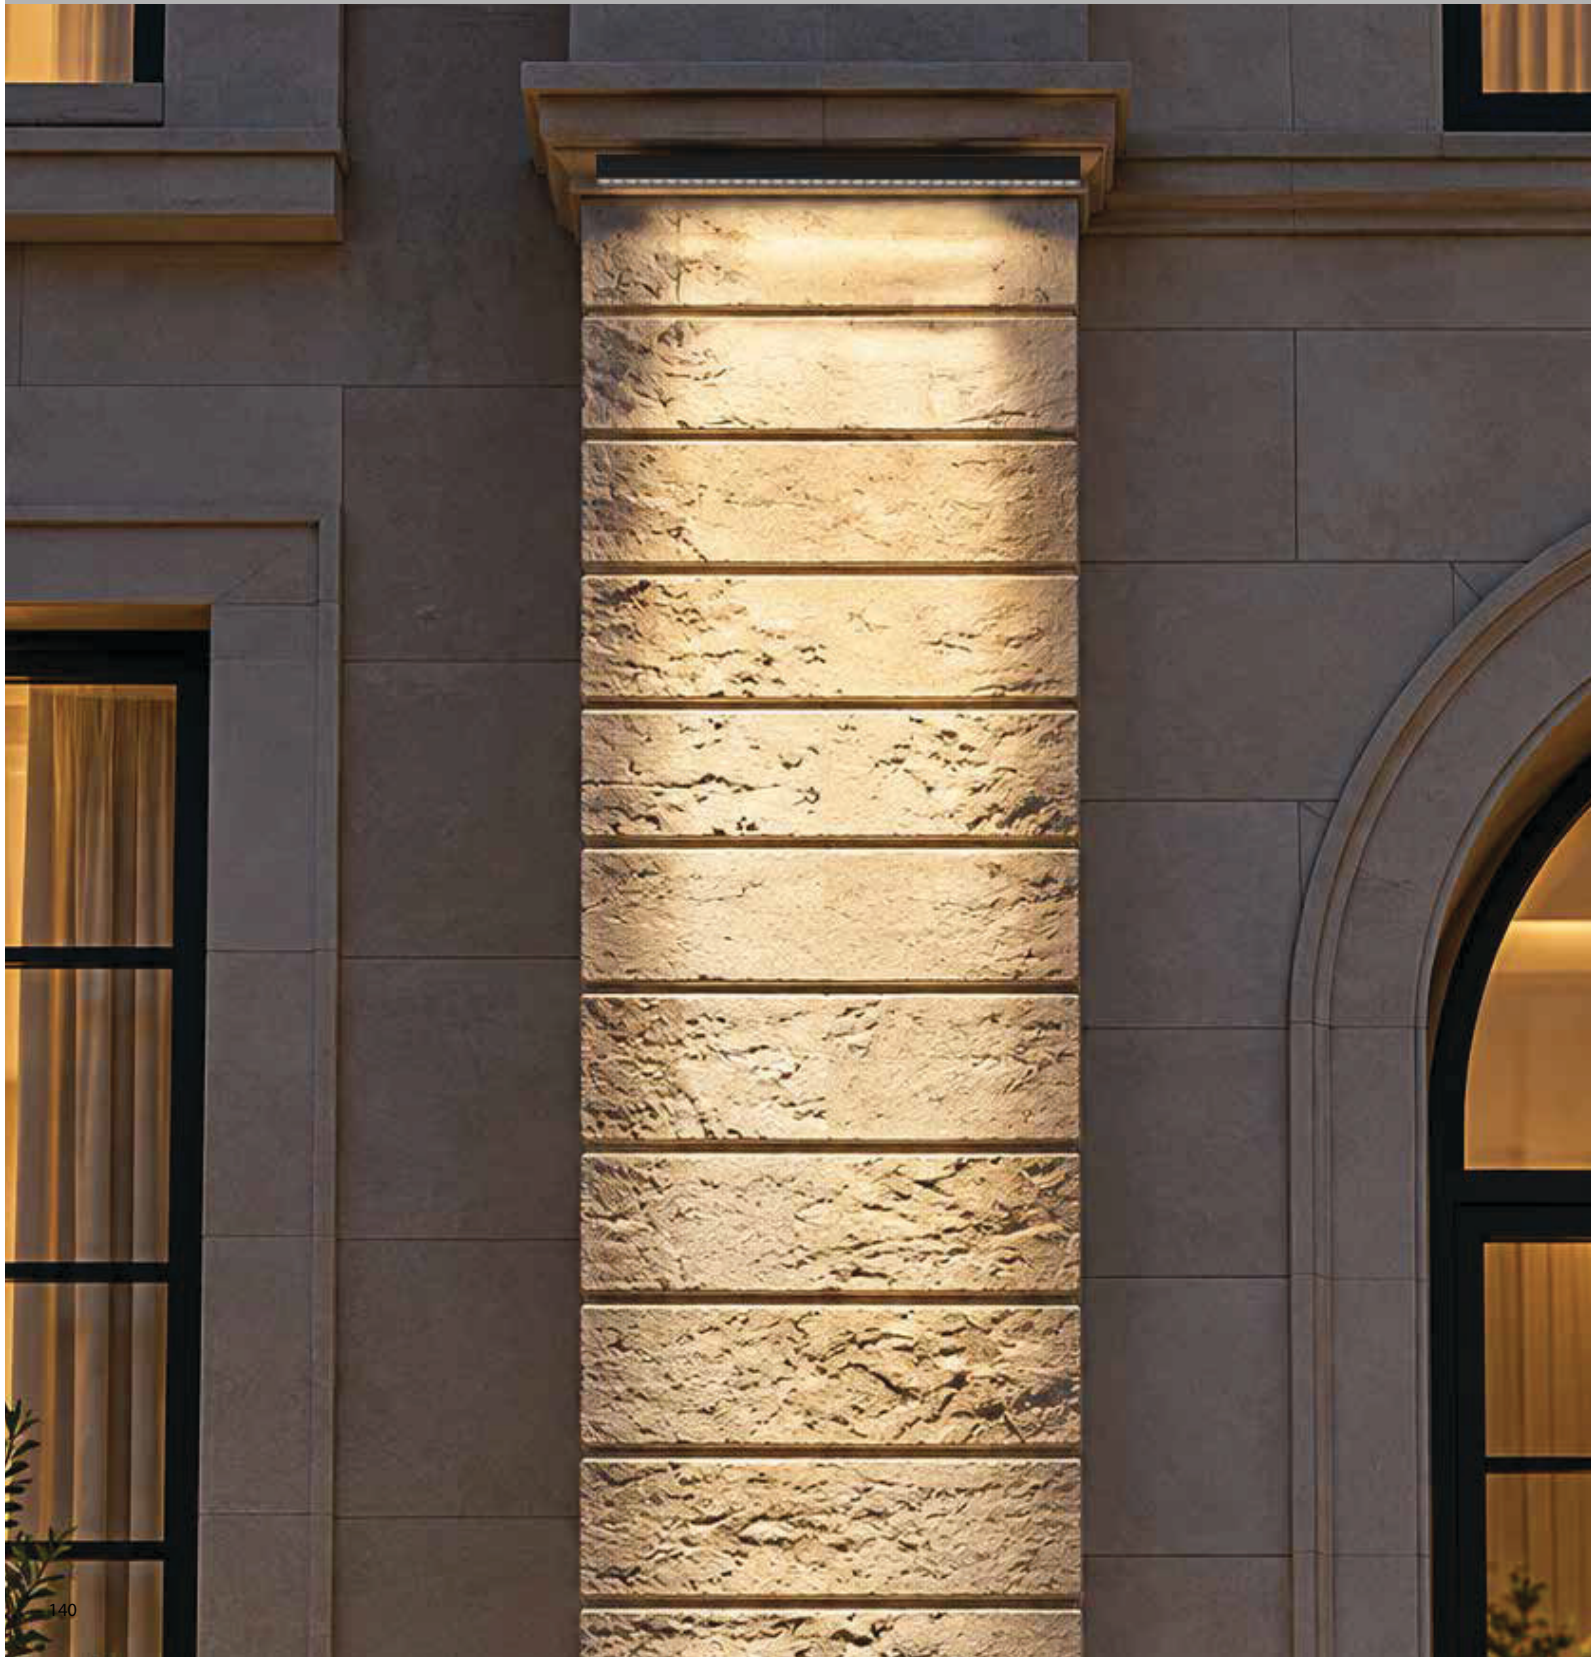
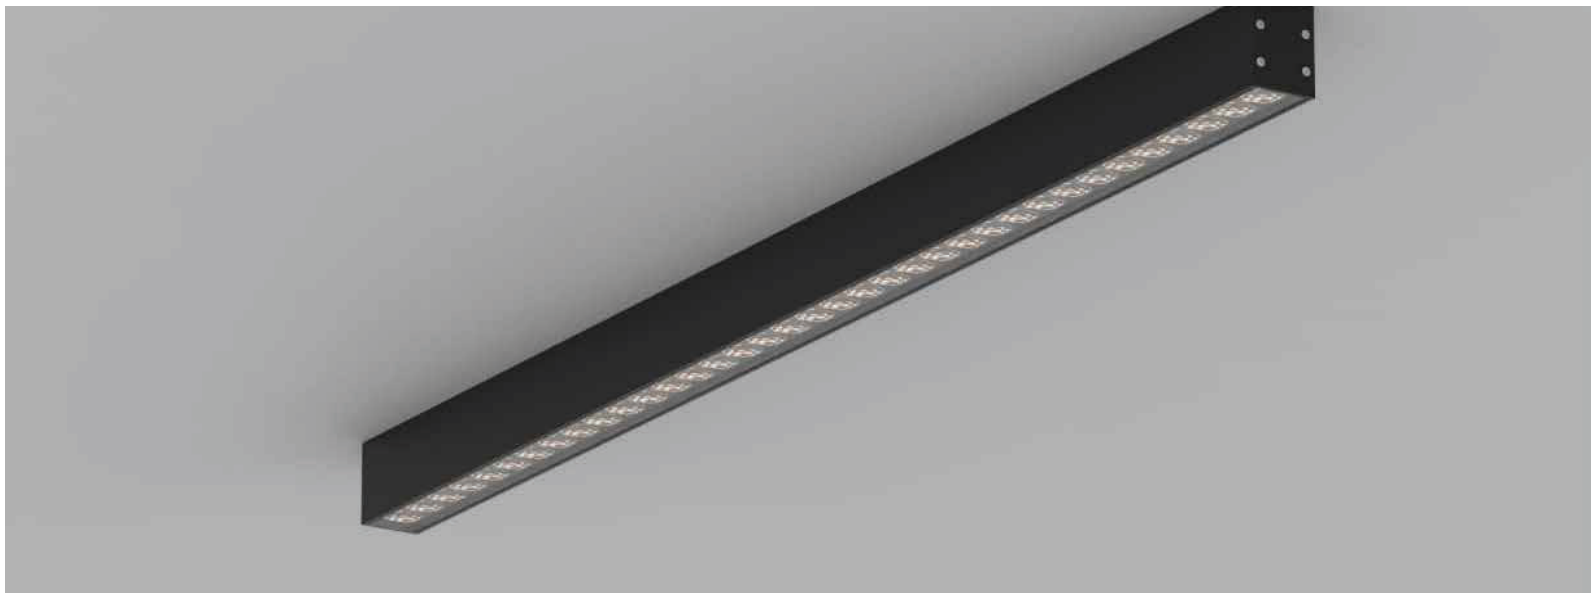






UNITY- 4156 HONEYCOMB

Unity-4156 Honeycomb Surface Linear Light has:

- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & moisture
- Ideal heat dissipation with good quality heat sink
- COB (Chip on Board) technology with Honeycomb accessories
- Surface mounting
- Beam Angle 5°/ 10°/ 15°/ 20°/ 25°/ 30°/ 45°/ 60°/ 10X20°/ 10X30°/ 10X45°/ 10X60°/ 25ASY10° option available
- Uniform distribution of light in the outdoor environment
- High quality toughened glass to ensure the safety of the fixture

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K, RGB, RGBW

Non-Dimmable/ Dali-Dimmable

DMX Controller

SDCM<3

Clear Tempered Glass with

Honeycomb accessories



L70 @50,000h

Aluminium Die-Cast

Type

Surface

Single Line Diagram



CRI ≥ 80

UNITY-4156 HONEYCOMB



System Power	Dimensions
24W/Mtr	L= 1000mm, W= 41.6mm, H= 56mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

RGB

RGBW

CRI

>80

Beam Angle

5°

10°

15°

20°

25°

30°

45°

60°

10X20°

10X30°

10X45°

10X60°

25ASY10°

Control

Non-Dimmable

Dali- Dimmable

DMX Controller



Mounting Type

Burial

Material Color

RAL as per request