

UNITY-SM 4056

SURFACE LINEAR LIGHTS

Direct | Surface




UNITY-SM 4056 SURFACE LINEAR LIGHT The UNITY-SM 4056 Surface Linear Light features a sleek, modern design with a die-cast aluminium housing, providing excellent durability and efficient heat dissipation.

Designed for surface-mounted installation, it offers IP66 protection against dust and moisture, making it suitable for demanding indoor and outdoor environments. Equipped with high-performance COB LED technology and clear tempered glass with honeycomb optical accessories, it ensures uniform light distribution and controlled illumination. Available with multiple beam angles, including 5°, 10°, 15°, 20°, 25°, 30°, 45°, 60°, 10×20°, 10×30°, 10×45°, 10×60°, and 25ASY10° options, it delivers versatile lighting solutions for architectural and commercial applications.

Divinity Lights provides customized lighting solutions according to clients' specific project requirements.

Single Line Diagram

Surface Mounted

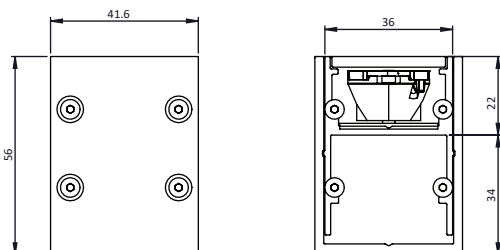

UNITY-SM 4056 SURFACE LINEAR LIGHT



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP66

Driver Details

Non-Dimmable/ Dali Dimmable/ DMX Controller

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K/ 3000K/ 4000K/ RGB/ RGBW

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle

5-60°/ 10X20°/ 10X20°10X45°/ 10X60°/ 2ASY10°

Optics

Clear Tempered Glass with Honeycomb accessories

Efficacy

80lm/W

Electrical

Wattage - 24W/Mtr

Input Voltage- 220-240V AC

Physical Dimensions

Length- 1000mm

Height- 56mm

Width- 41.6mm