

VELORA W TRM



divinity lights

Quick Info


CRI \geq 90
3000K, 4000K, 5700K
Tunable White 2700-6500K
ON-OFF/ ON-OFF (FLICKER FREE)
DALI-2 DT6 / DALI-2 DT8/ DALI +
SDCM $<$ 3
Lens & Reflector
L70 @50,000h
Aluminium Die-cast

Type

Recessed

Single Line Diagram

Recessed

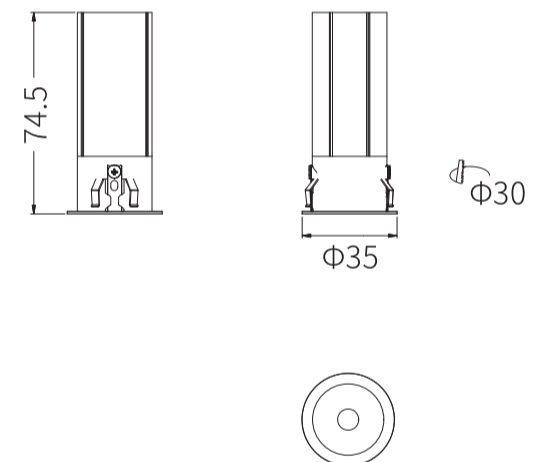


VELORA W TRM

Velora W TRM Fixture has:

- Luminaire housing of die-cast- aluminium
- Round recessed spotlight with effortless installation
- Surface powder coated
- COB (Chip on Board) technology
- Technology for maximum efficiency
- For specific areas or to accentuate a feature
- Zero multiple shadows
- LED with effective colour rendering
- Overflowing colours with soft light and shadow
- Interpretation of the real environment light and colours
- High colour rendering

Light Distribution

Direct



CRI \geq 90/95




TUNABLE WHITE

VELORA W TRM



VELORA W TRM 30

Product order code	System Power	Dimensions
4065-  1	5W	Outer Dia =35mm Cutout Dia = 30mm H = 74.5mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI

>90	1
-----	---

Beam Angle

24°	1
-----	---

Control

ON-OFF	
ON-OFF (FLICKER FREE)	
DALI-2 DT6	
DALI-2 DT8	
DALI +	

Mounting Type

Recessed	1
----------	---

Material Colour

White	 1
Black	 2