

VELORA WO TRM



divinity lights

Quick Info

CRI ≥ 90

3000K, 4000K, 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Lens & Reflector

L70 @50,000h

Aluminium Die-cast




Type

Recessed

Single Line Diagram

Recessed

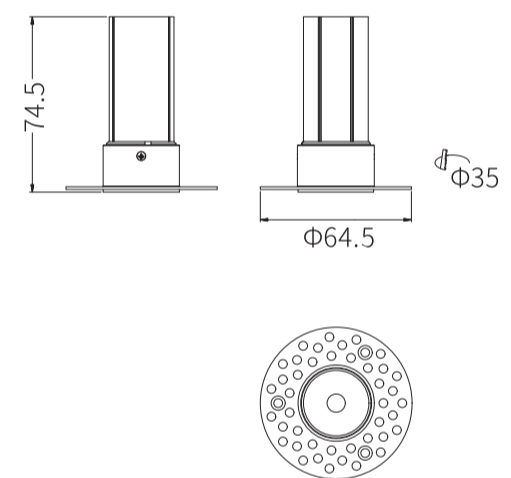


VELORA WO TRM

Velora WO TRM Fixture has:

- Luminaire housing of die-cast- aluminium
- Round recessed spotlight with effortless installation
- Surface powder coated
- COB (Chip on Board) technology
- Technology for maximum efficiency
- For specific areas or to accentuate a feature
- Zero multiple shadows
- LED with effective colour rendering
- Overflowing colours with soft light and shadow
- Interpretation of the real environment light and colours
- High colour rendering

Light Distribution

Direct



CRI ≥ 90/95



TUNABLE WHITE

VELORA WO TRM



VELORA WO TRM 35

Product order code	System Power	Dimensions
4066 - 1	5W	Outer Dia = 64.5mm Cutout Dia = 35mm H = 74.5mm

Order Options

Distribution	
Direct	
CCT (Color Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4
CRI	
>90	1
Beam Angle	
15°	1
24°	2
36°	3
Control	
ON-OFF	
ON-OFF (FLICKER FREE)	
DALI-2 DT6	
DALI-2 DT8	
DALI +	
Mounting Type	
Recessed	1
Material Colour	
Silver	1