

divinity lights



CRI ≥ 90 2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable SDCM<3 PC Diffuser L70 @50,000h Aluminium Die-Cast

Types

Surface


Single Line Diagram






Venice-Cl Column fixture has:

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor

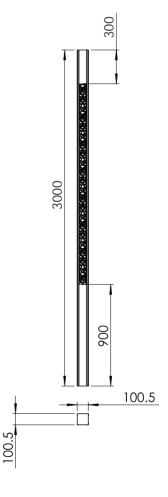



CRI ≥ 90

divinity lights

VENICE-C1 COLUMN

UNPUT VOLTAGE ZAV DC IP66	CRI 2 90	
Product Order Code	System Power	Dimensions
1908	20W	LXW=100mmX100mm Pole Height=3000mm

Order Options

CCT (Colour Temperature)

2700K 3000K 4000K

CRI

>90

Beam Angle

N.A

Control

Non-Dimmable	<u>×</u>
Dali-Dimmable	

Mounting Type

Surface

Material Colour

Grey