





VENICE-C5 COLUMN

Venice-C5 Column fixture has:

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor

divinity lights

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/Dali-Dimmable

SDCM<3

Lens + PC Diffuser


L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

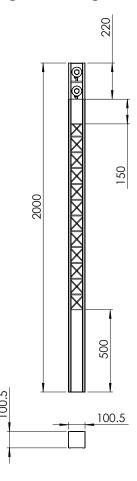



CRI ≥ 90

divinity lights

VENICE-C5 COLUMN









Product Order Code	System Power	Dimensions
1912	30W	LXW=100mmX100mm Pole Height=2000mm

Order Options

CCT (Colour Tempe	rature)
2700K	
3000K	
4000K	
CRI	
>90	
Beam Angle	
N.A	
Control	
Non-Dimmable	NGTH Girandile
Dali-Dimmable	

Surface

Material Colour

Grey