

VENICE-C6
COLUMN

divinitylights



Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM <3

Lens + PC Diffuser



L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

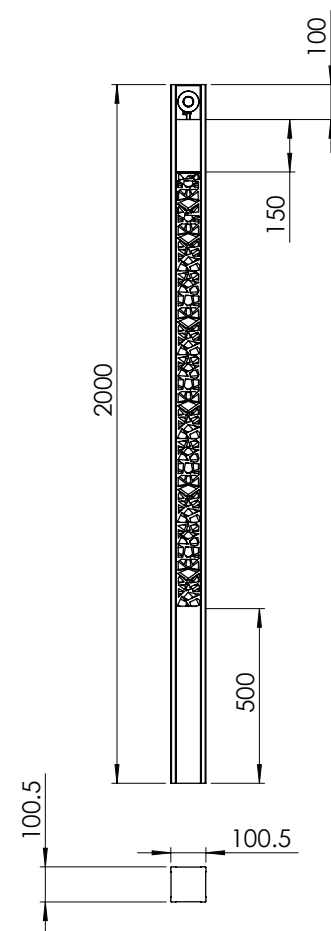

CRI ≥ 90

VENICE-C6 COLUMN

Venice-C6 Column fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor

VENICE-C6 COLUMN



Product Order Code	System Power	Dimensions
1913	25W	LXW=100mmX100mm Pole Height=2000mm

Order Options

CCT (Colour Temperature)

- 2700K
- 3000K
- 4000K

CRI

>90

Beam Angle

N.A

Control

- Non-Dimmable
- Dali-Dimmable



Mounting Type

Surface

Material Colour

- Grey