


VIRAJ 100

divinity lights



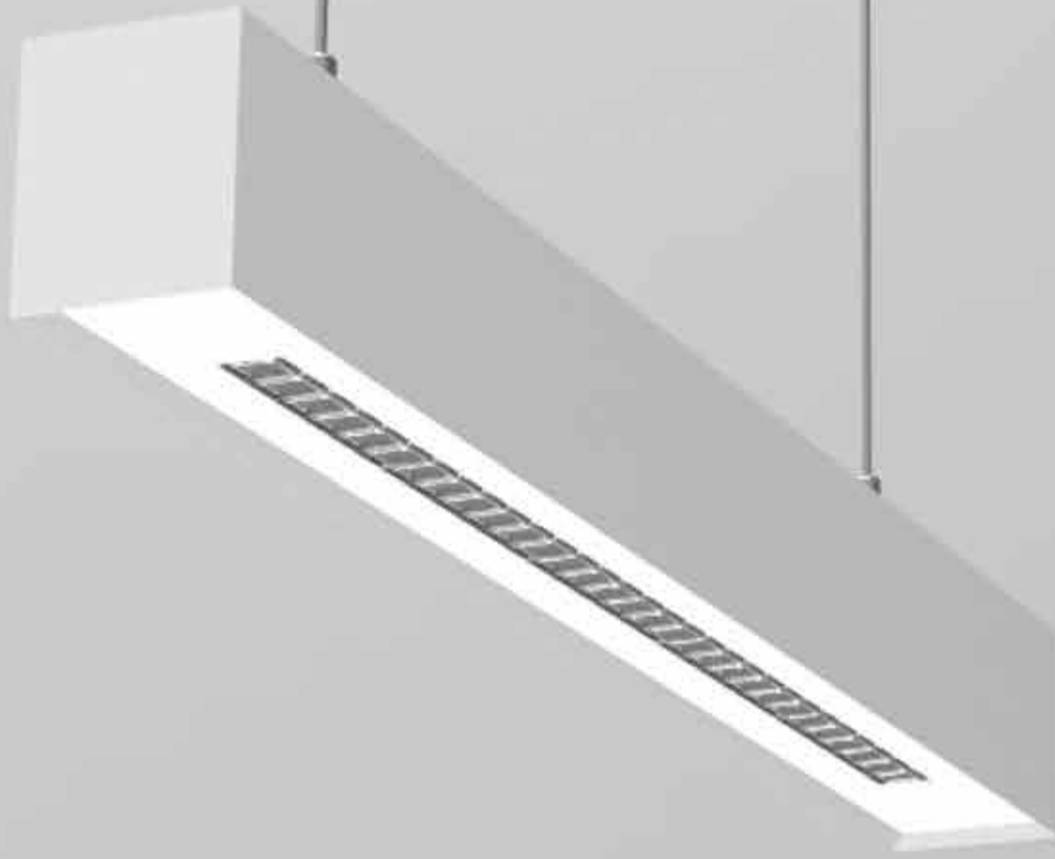

Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

Tunable White 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Dual Optics (Opal/Prismatic Diffuser + Lens)

L70 @50,000h

Aluminium

Types



Pendant

Single Line Diagram

Pendant Mounted

Profile Code

SDL-8005

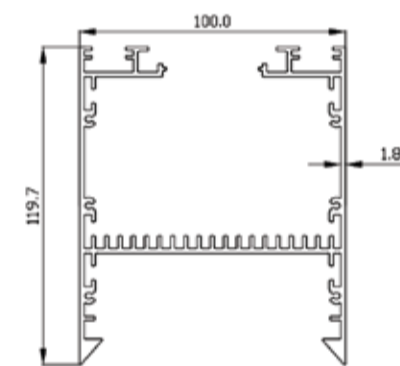

Prismatic Diffuser



Lens




VIRAJ 100 Direct | Pendant

VIRAJ 100 Direct | Pendant has:

- Luminaire housing of extruded aluminium
- Viraj 100 Direct, Direct-Indirect Profile
- Surface powder coated
- LED PCB mounted on insert design with heat sink
- Snap-fit system and no visible screws
- Bottom opening for easy maintenance
- Pendant with cable suspension
- Dual Optics (Opal/Prismatic Diffuser, + Lens)
- Uniform illumination and glare control
- Energy- efficient LED with color rendering

Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE WHITE

VIRAJ 100



VIRAJ 100 (DIRECT)

System Power	Dimensions
30W	L = 600mm
60W	L = 1200mm
120W	L = 2400mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

52°

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Recessed

Material Color

RAL As Per Request

Photometric

LUMINOUS INTENSITY DISTRIBUTION

