



VIRAJ 35

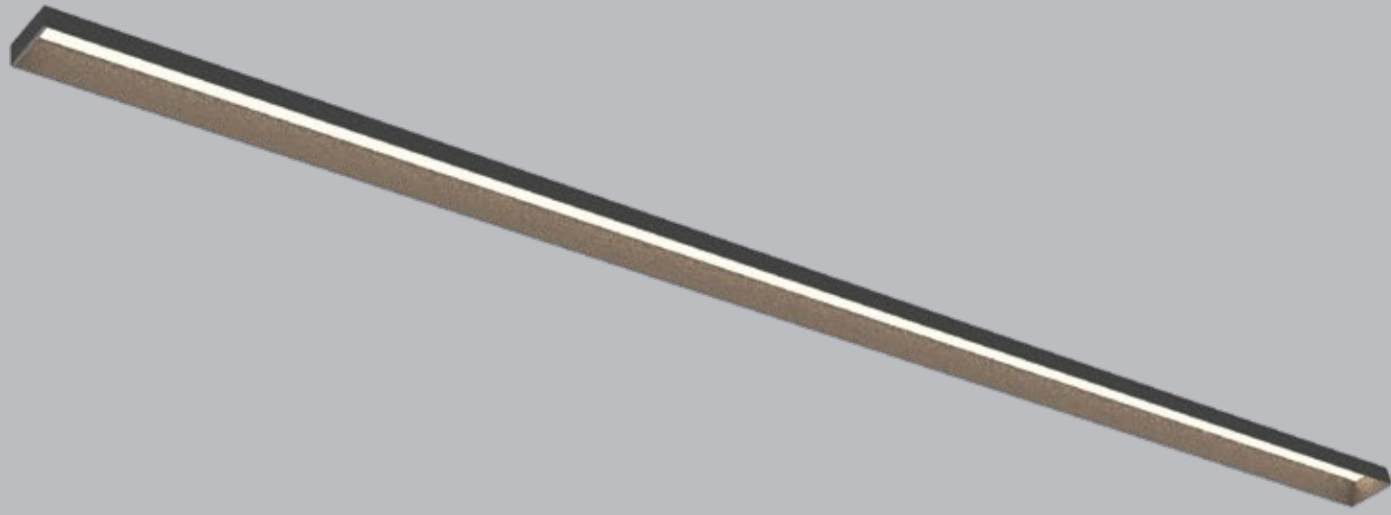

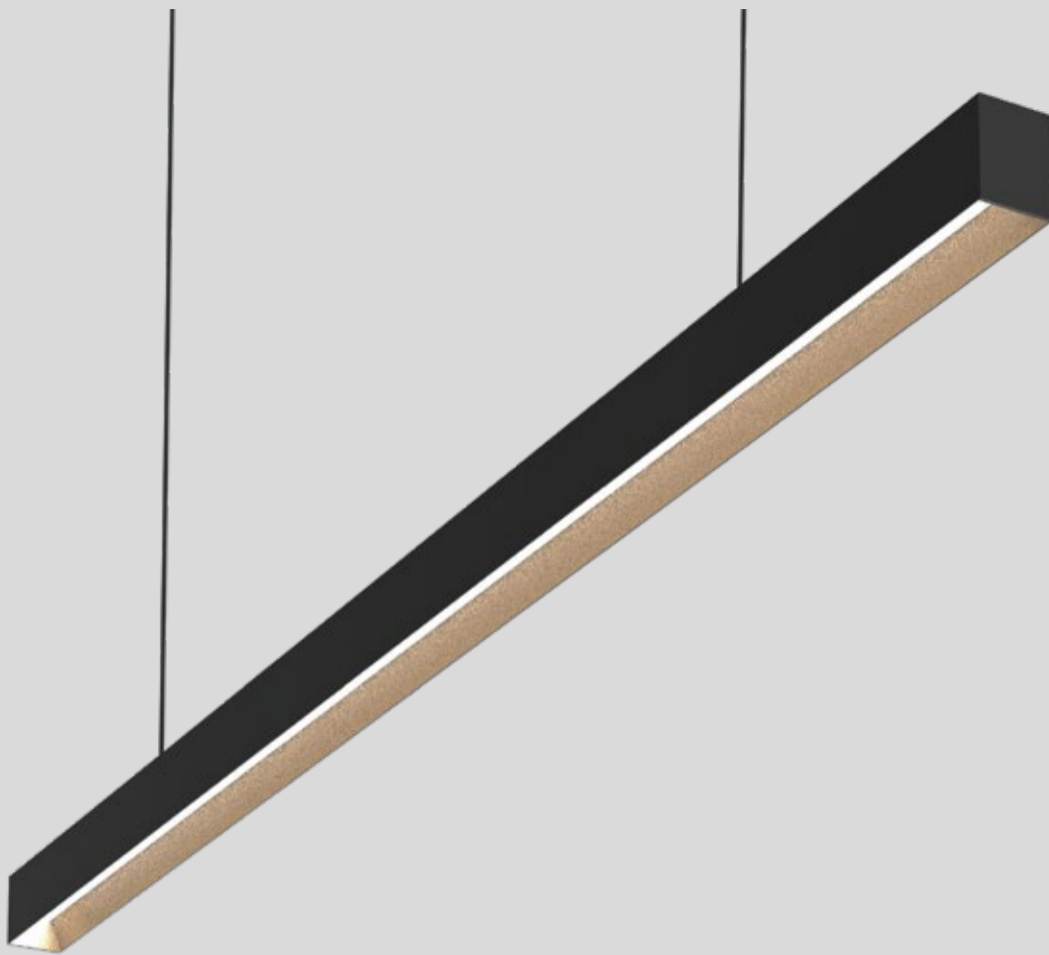

VIRAJ 35

VIRAJ 35 light features has:

- Luminaire housing of extruded aluminium
- High-performance Micro Prismatic Diffuser
- Snap-fit system No visible screw
- Better refractive index to reduce glare
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- High-performance PMMA & Micro Prismatic Diffuser
- Energy-efficient LED with high color rendering

Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

TUNABLE WHITE 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser

L70 @50,000h

Aluminium


Types

Pendant/Surface

Single Line Diagram


Pendant/Surface Mounted

Profile Code
SHF-1012




Semi Recessed Mounted

Profile Code
SHF-1013

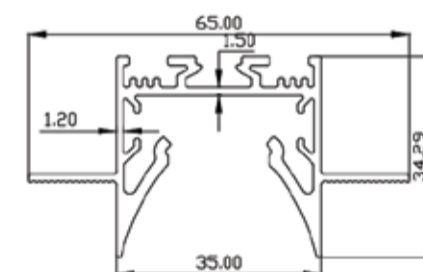

Recessed Mounted

Profile Code
SHF-1014



VIRAJ 35



VIRAJ 35 (DIRECT)

System Power	Dimensions
5W	L = 300mm
10W	L = 600mm
15W	L = 900mm
20W	L = 1200mm
40W	L = 2400mm

Order Options

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Surface
- Recessed

Material Color

RAL As Per Request