
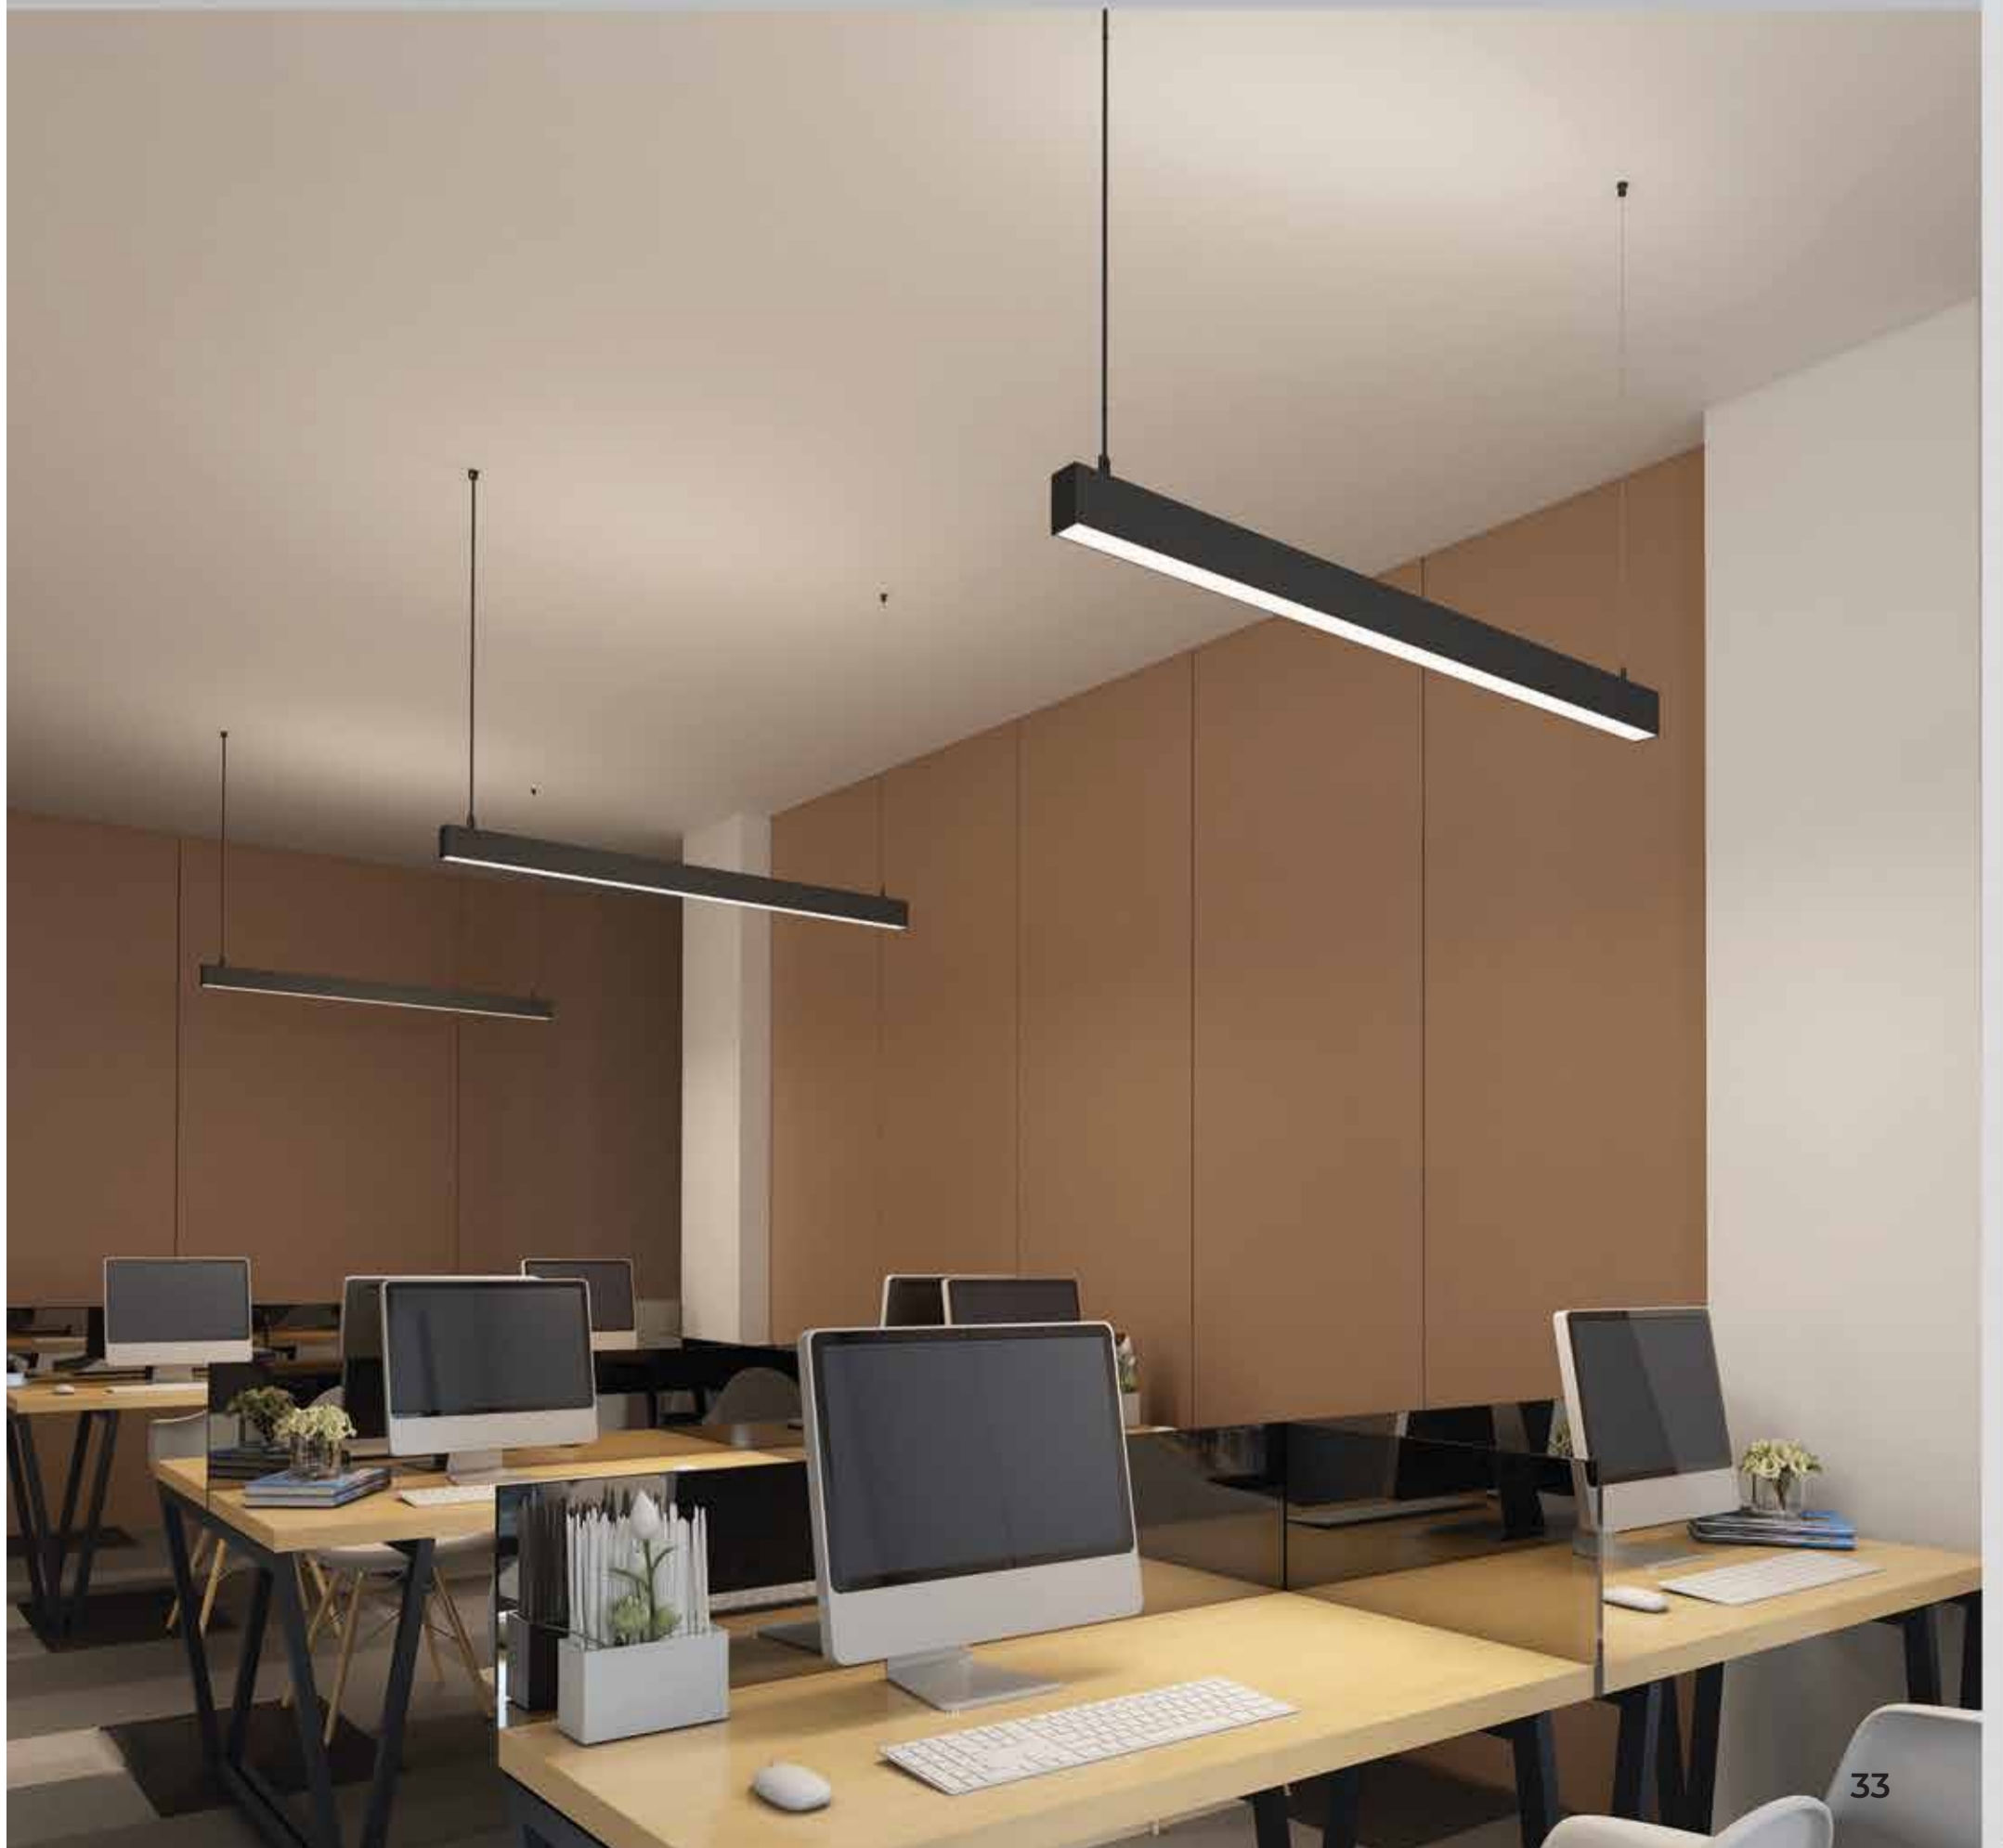


VIRAJ 45

divinity lights

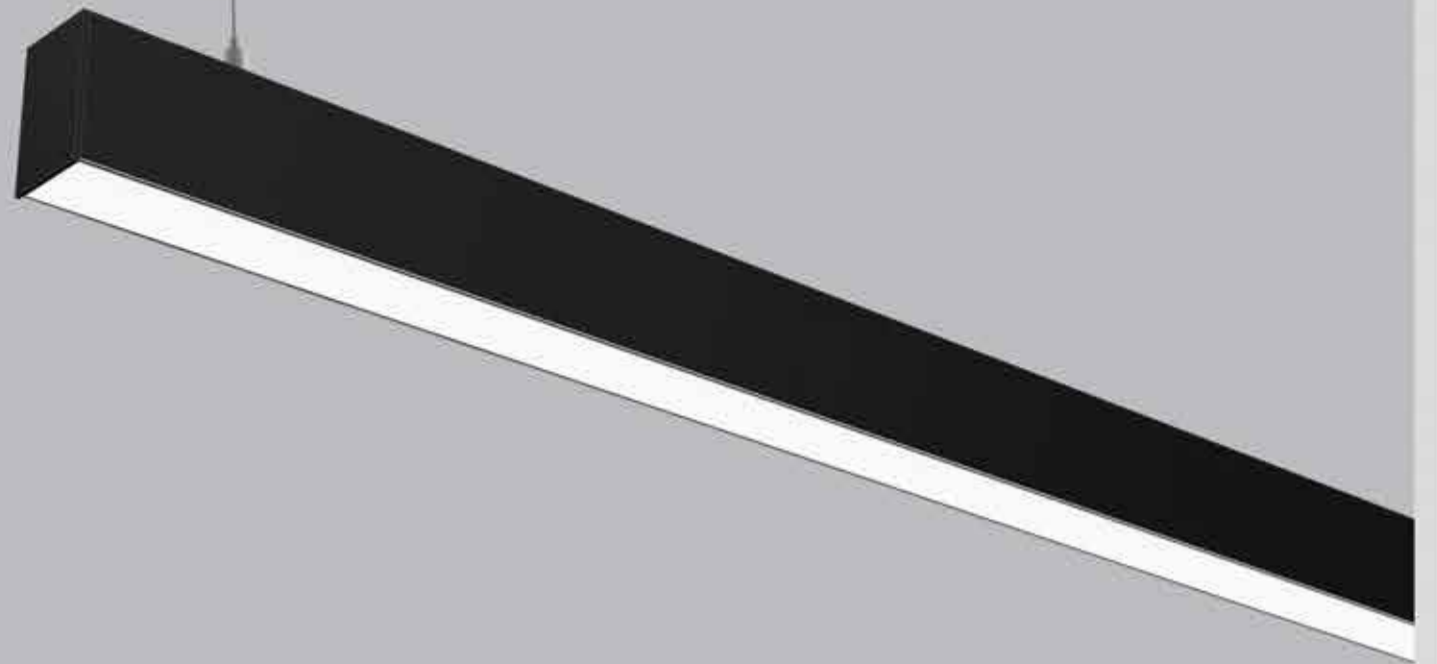

## Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

TUNABLE WHITE 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

PMMA Diffuser

L70 @50,000h

Aluminium


## Types

Pendant/ Surface/ Recessed


## Single Line Diagram

### Pendant Mounted

Profile Code  
SY-12




Profile Code  
SY-22




### Recessed Mounted

Profile Code  
SY-14

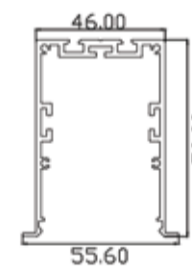

## Light Distribution


Direct    Direct-Indirect



CRI ≥ 90



TUNABLE  
WHITE




## VIRAJ 45

Viraj 45 linear fixture has :

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High performance PMMA diffuser
- Snap fit system
- Energy efficient LED
- LED PCB mounted on insert design with heat sink
- No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

**VIRAJ 45**



**VIRAJ 45 (DIRECT)**

System Power	Dimensions
7W	L = 300mm
14W	L = 600mm
21W	L = 900mm
28W	L = 1200mm
56W	L = 2400mm

**VIRAJ 45 (DIRECT-INDIRECT)**

System Power	Dimensions
9W	L = 300mm
18W	L = 600mm
27W	L = 900mm
35W	L = 1200mm
70W	L = 2400mm

**Order Options**

**Distribution**

- Direct
- Indirect
- Up-50% / Down-50%
- Up-30% / Down-70%
- Up-70% / Down-30%
- Up-20% / Down-80%
- Up-80% / Down-20%

**CCT (Color Temperature)**

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



**CRI**

>90

**Beam Angle**

98.2

**Control**

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



**Mounting Type**

- Pendent
- Surface
- Recessed

**Material Color**

RAL As Per Request

**PHOTOMETRIC**

