



**VIRAJ 45
SQUARE**

divinity lights

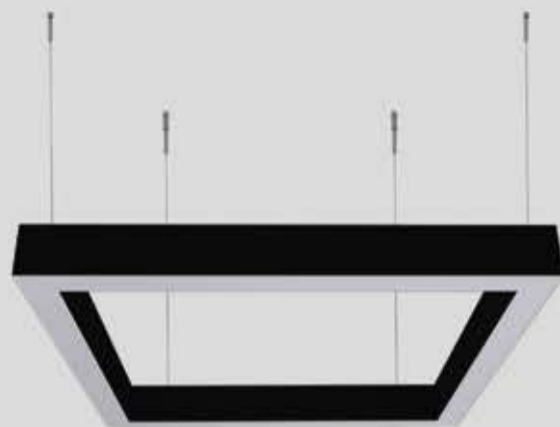

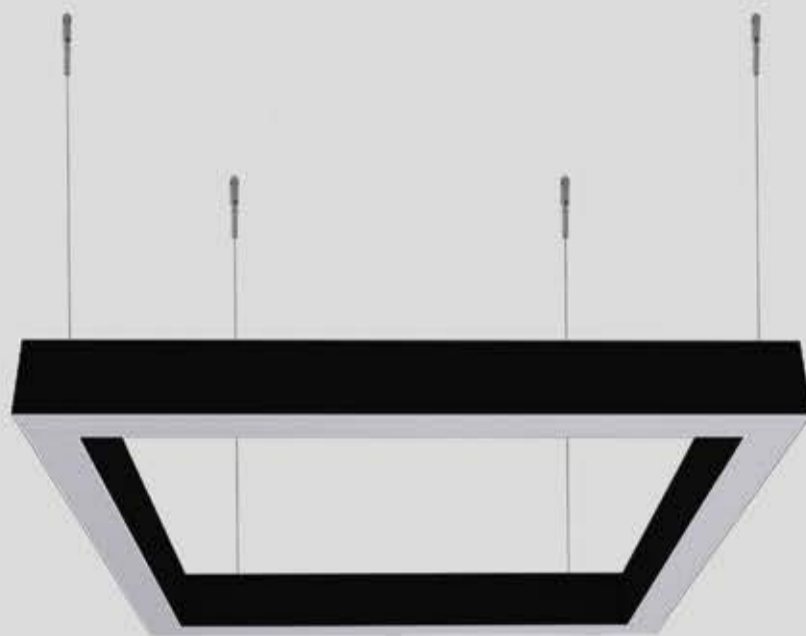

VIRAJ 45 SQUARE

Viraj 45 Square has :

- Square ring
- Surface powder coated
- Luminaire housing of aluminium
- LED PCB mounted
- Bottom opening for easy maintenance
- Pendant with cable suspension
- Quick mounting system
- M6 bolt for M6 fastener
- High performance Micro Prismatic Diffuser
- Uniform illumination
- Energy-efficient LED with color rendering

Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser

L70 @50,000h





Aluminium

Types

Pendant/ Surface


Single Line Diagram

Pendant/ Surface



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

VIRAJ 45 SQUARE



VIRAJ 45 SQUARE (DIRECT)

System Power	Dimensions
35W	LXW= 600mmX600mm Profile W= 46mm, H=70mm
70W	LXW= 1200mmX1200mm Profile W= 46mm, H=70mm
105W	LXW= 2400mmX2400mm Profile W= 46mm, H=70mm

VIRAJ 45 SQUARE ((DIRECT-INDIRECT)

System Power	Dimensions
35W	LXW= 600mmX600mm Profile W= 46mm, H=70mm
70W	LXW= 1200mmX1200mm Profile W= 46mm, H=70mm
105W	LXW= 2400mmX2400mm Profile W= 46mm, H=70mm

Order Options

Distribution

- Direct
- Indirect
- Up-50% / Down-50%
- Up-30% / Down-70%
- Up-70% / Down-30%
- Up-20% / Down-80%
- Up-80% / Down-20%

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Surface

Material Color

RAL As Per Request