VIRAJ 52

Direct | Pendant

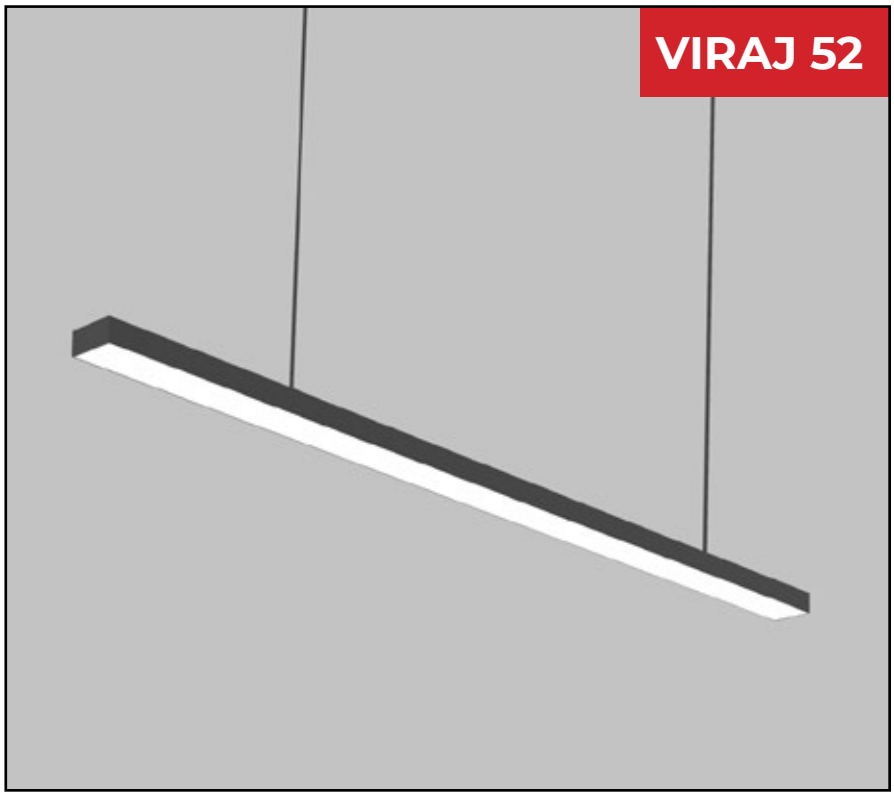

VIRAJ 52 Suspended Linear Luminaire in a sleek design with a slim Extruded aluminum housing and with premium powder coating finish.

Powered by high-quality LED's with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long-term reliability. HPO diffuser (High-Performance Micro Prismatic Diffuser) provides uniform illumination.

With a standard size of 1200 mm length,25 mm height, and 52.20 mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

Single Line Diagram

Pendant Mounted

Profile Code
SHF-1003



VIRAJ 52

INPUT 220-240 VAC | IP40 | CRI >90

Quick Info

Mounting Type
Pendant

Material Colour
Customize RAL avilable

Protection mode
IP40

Driver Details
ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +
Power Factor (PF) -0.95
THD- <10%
UGR - <19

LED
CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K
CRI- ≥ 90
Life Span - L70@50000h
MacAdam - ≤3 SDCM

Beam Angle
Diffused

Optics
Micro Prismatic Diffuser

Efficacy
3000K- 125.3
4000K- 132.9
5700K- 147.1
Tunable white 2700k-6500k- 132.9

Electrical
Wattage- 28W/4ft
Opt Wattage Available- 7W/ 14W/ 21W/ 28W/ 56W/4ft
Input Voltage - 220-240 VAC

Physical
Length- 1200mm
Height- 25 mm
Width- 52.20 mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com