


**VIRAJ 5690
DAISY**

divinity lights



VIRAJ 5690 DAISY LENS

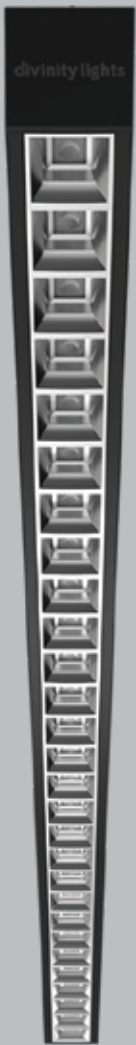

VIRAJ 5690 DAISY
LENS + DIFFUSER



divinity lights

Quick Info

CRI $\geq$ 90

3000K/ 4000K/ 5700K

Tunable White 2700K-6500K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Lens

L70 @ 50,000h


Aluminium

Types





Pendant/ Surface/ Recessed

Single Line Diagram

Pendant/ Surface



Recessed



VIRAJ 5690 DAISY

Viraj 5690 Daisy sleek and slim linear fixture has :


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- Snap- fit system with No visible screw
- Unique lens System
- 3 beam angle options 30°, 50° and widespread 80°
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance
- Lens and Prismatic diffuser available as option

Colours



Light Distribution

Direct Direct-Indirect



CRI $\geq$ 90



TUNABLE WHITE

VIRAJ 5690 DAISY



VIRAJ 5690 DAISY (DIRECT)

Product Order Code	System Power	Dimensions
1008-11	7W	L = 300mm
1008-12	14W	L = 600mm
1008-13	21W	L = 900mm
1008-14	28W	L = 1200mm
1008-15	56W	L = 2400mm


VIRAJ 5690 DAISY (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1008-1	9W	L = 300mm
1008-2	18W	L = 600mm
1008-3	27W	L = 900mm
1008-4	35W	L = 1200mm
1008-5	70W	L = 2400mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6
CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4
CRI	
>90	1
Beam Angle	
30°	1
50°	2
80°	3
Control	
ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2 DT6	3
DALI-2 DT8	4
DALI +	5
Mounting Type	
Pendant	1
Surface	2
Recessed	3
Material Colour	
Black	1
White	2
Grey	3

Accessories

Product Order Code	Accessories Name	Accessories Image
1008-01 	LED PCB	
1008-02	Suspension Wire	
1008-03	30° Lens	
1008-04	50° Lens	
1008-05	80° Lens	
1008-06	Micro Prismatic Diffuser	
1008-07	Profile Connector	
1008-08 	Profile Endcap	

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



1

2

3

4

CRI

>90

1

Material Colour

Black

White

Grey

1

2

3