


**VIRAJ 5690 DEEP
RECEESDE**

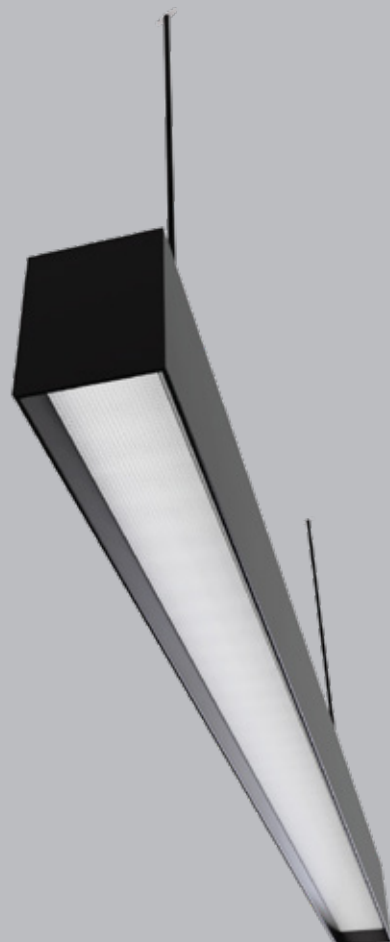

Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

TUNABLE WHITE 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser

L70 @50,000h

Aluminium


Types

Pendant/Surface


Single Line Diagram

Pendant Mounted


Outer Profile Code
SDL-2016

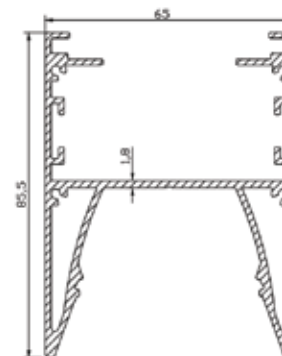


Outer Profile Code
SDL-1016




Outer Profile Code
SDL-1021





Insert Profile Code
SDL-1020



Outer Profile Code
SDL-1019



Insert Profile Code
SY-102



VIRAJ 5690 DEEP RECESSED

VIRAJ 5690 deep recessed light features has:

- Luminaire housing of extruded aluminium
- High-performance Micro Prismatic Diffuser
- Snap-fit system No visible screw
- Better refractive index to reduce glare
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- High-performance PMMA & Micro Prismatic Diffuser
- Energy-efficient LED with high color rendering

VIRAJ 5690 DEEP RECESSED



VIRAJ 5690 DEEP RECESSED (DIRECT)

System Power	Dimension
7W	L = 300mm
14	L = 600mm
21	L = 900mm
28	L = 1200mm
56	L = 2400mm

VIRAJ 5690 DEEP RECESSED (DIRECT-INDIRECT)

System Power	Dimension
9W	L = 300mm
18	L = 600mm
27	L = 900mm
35	L = 1200mm
70	L = 2400mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

120°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Pendant

Surface

Material Colour

RAL As Per Request

Photometric Details

