


**VIRAJ 5690
PRISMATIC**

divinity lights

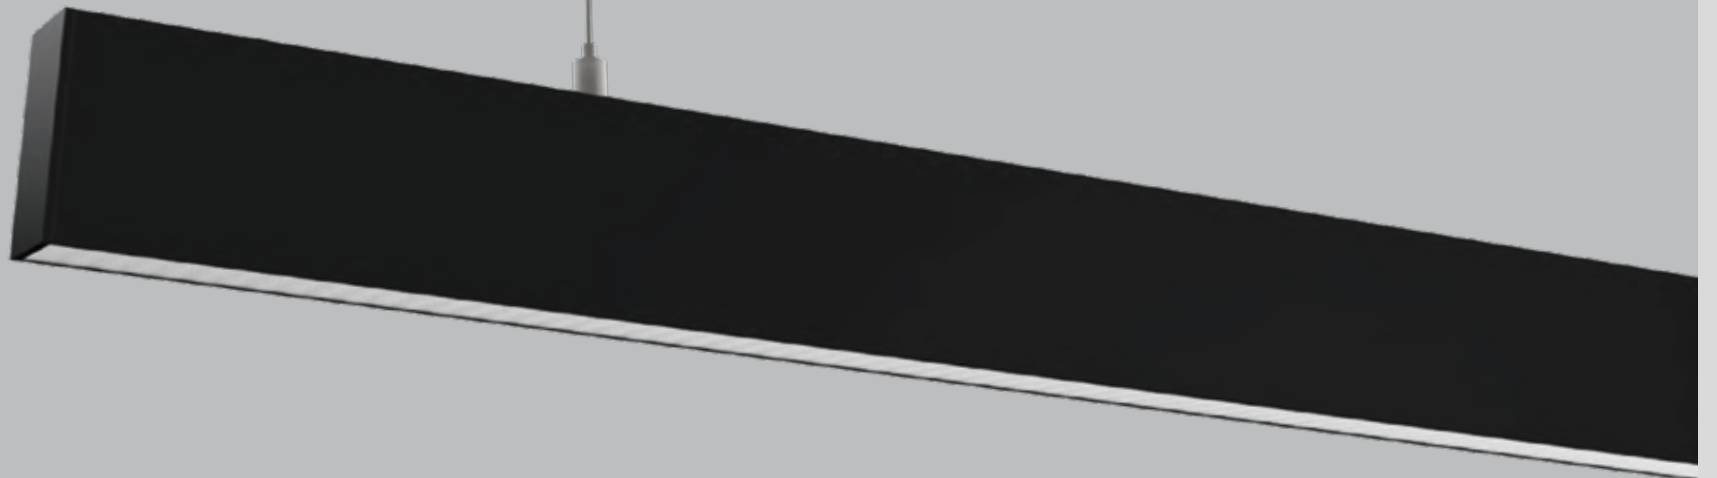

divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700K-6500K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Micro Prismatic Diffuser
(Double Diffuser)

L70 @ 50,000h


Aluminium

Types


Pendant/ Surface/ Recessed

Single Line Diagram

Pendant/ Surface



Recessed




Colours



Light Distribution


Direct Direct-Indirect





CRI ≥ 90



TUNABLE WHITE

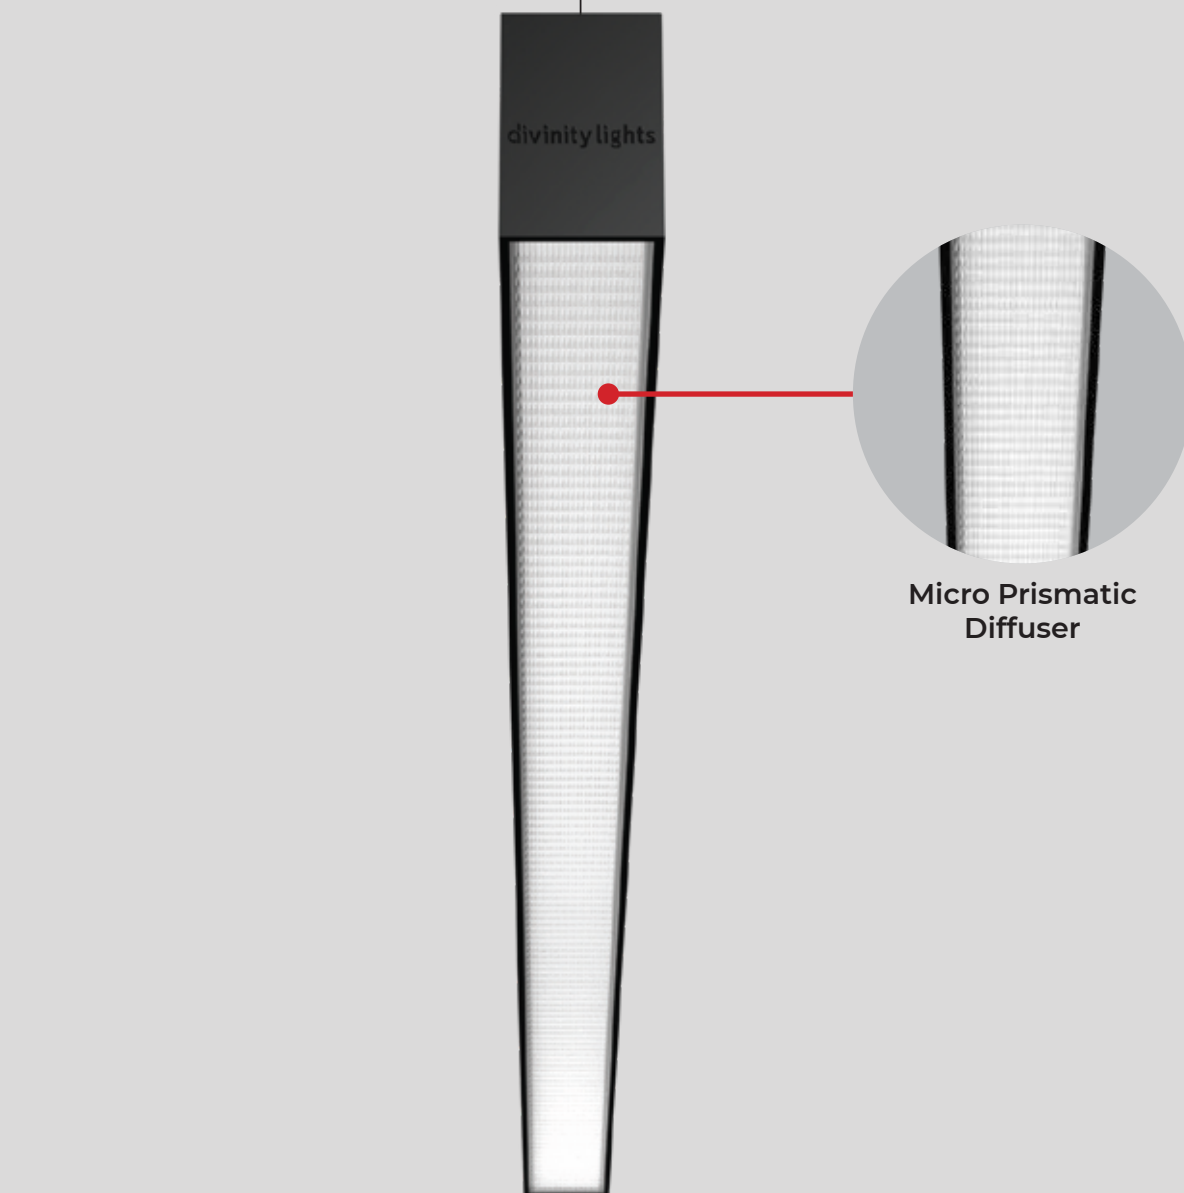

Micro Prismatic
Diffuser



VIRAJ 5690 PRISMATIC

Viraj 5690 Prismatic sleek and slim linear fixture has:

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Prismatic Diffuser
- Better refractive index to reduce glare
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap- fit system
- No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

VIRAJ 5690 PRISMATIC



VIRAJ 5690 PRISMATIC (DIRECT)

Product Order Code	System Power	Dimensions
1007-1□●●■▱○1	7W	L = 300mm
1007-1□●●■▱○2	14W	L = 600mm
1007-1□●●■▱○3	21W	L = 900mm
1007-1□●●■▱○4	28W	L = 1200mm
1007-1□●●■▱○5	56W	L = 2400mm

VIRAJ 5690 PRISMATIC (DIRECT-INDIRECT)

Product Order Code	System Power	Dimensions
1007-▼□●●■▱○1	9W	L = 300mm
1007-▼□●●■▱○2	18W	L = 600mm
1007-▼□●●■▱○3	27W	L = 900mm
1007-▼□●●■▱○4	35W	L = 1200mm
1007-▼□●●■▱○5	70W	L = 2400mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI	
>90	1

Beam Angle	
110°	

Control		
ON-OFF	⏻	1
ON-OFF (FLICKER FREE)	👁️	2
DALI-2 DT6	DALI	3
DALI-2 DT8	DT8	4
DALI +	DALI+	5

Mounting Type	
Pendant	1
Surface	2
Recessed	3

Material Colour		
Black	●	1
White	○	2
Grey	●	3

Accessories

Product Order Code	Accessories Name	Accessories Image
1007-01 	LED PCB	
1007-02	Suspension Wire	
1007-03	PMMA Diffuser	
1007-04	Micro Prismatic Diffuser	
1007-05	Profile Connector	
1007-06 	Profile Endcap	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1
Material Colour		
Black		1
White		2
Grey		3